

 **SAILUN**
TIRE



PCR

PASSENGER AND LIGHT TRUCK
TIRES CATALOGUE **2017**

SAILUN TIRE

Sailun Tires have built up an enviable reputation throughout the world as the manufacturer and provider of high- quality, great value premium economy tires. Covering a number of applications, Sailun manufactures research-led tire patterns for every type of day-to-day use.

Sailun was established in 2002 in the National Economic and Technological Development Zone in Qingdao, China. Now, Sailun is capable of producing 41.6 million PCR tires, 7.3 million TBR tires, and 33k tons of OTR tires and sells them in over 50 countries worldwide. From the outset, the Sailun tire company has combined technical expertise with innovative research and development to design and manufacture world-class tires for all types of vehicles.

It selects only world-class partners and recognised leaders in their specific technological and rubber industry specialisation. Sailun's growth is attributable to its commitment to three core values – Quality products, service you can Trust and lifetime Support. Sailun is With You Through Every Turn.

SAILUN WORLDWIDE

Sailun has five factories, four located in the northern part of mainland China and one located in Vietnam. Via a corporate warehousing facility, Sailun distributes its tires globally through a precisely-appointed professional network of tire distributors.

Sailun works closely with every single distributor to ensure that the local Sailun opportunity is maximised in the most relevant and appropriate fashion – Think Global, Act Local. To this effect, we have established local sales reps and offices in the United States (Miami), Africa (Algeria and Nigeria), Europe (Birmingham), and Australia (Brisbane), as well as developed an R&D center at the Sailun Europe office. Building on the strong foundations of real-world testing, Sailun will continue to develop the most advanced and cost-efficient platform for tire manufacturing and distribution - while utilising its information technology and substantial research resources to help establish new tire patterns.

RESEARCH AND DEVELOPMENT

Sailun has made great progress in the tire industry despite its short history. Sailun currently invests over 30% of its resources in research and development. In 2009 Sailun, together with the Qingdao University of Science and Technology, was nominated to develop and build the optimal platform to promote and enhance tire technology, thus creating the National Tire Process and Control Engineering Technology Research Center.

The Center studies and resolves key technical issues in the tire manufacturing process. The vision of the Centre is to move the tire industry forward through the quest for improved technology and the production of higher quality products. Sailun is the first tire manufacturer to integrate production, research, and product demonstration into the development of new products. The Centre now employs over 300 technical specialists.

Sailun's computerised tire production and manufacturing processes - in conjunction with management techniques and network control systems - allows it to effectively monitor quality control, resource management, marketing, administration and logistics. In addition, Sailun uses advanced information technology to help track the data of each tire produced, and to benchmark the Sailun tire quality against other leading international standards of quality and design. Sailun collaborates closely with academic institutions to develop and improve formulation techniques, tire structure, tire testing methods, and information technology.

Sailun is accredited internationally and certified to meet the most stringent quality standards and the highest levels of quality assurance. Sailun is proud to have received the Parent Tested Parent Approved (PTPA) Seal of Approval for its Sailun Atrezzo and Ice Blazer tire line ups. PTPA is North America's largest volunteer parent testing community, with over 50,000 parents. The PTPA Winner's Seal is evidence of a product's excellence from having been evaluated by unbiased parent testers.

MISSION STATEMENT

To serve global communities by providing the best quality products, and creating value for our stakeholders through our team, our partners, and our customers- all while driving continuous improvement, respect for the environment, and the establishment of trust in everything we do.

CONTENTS

ATREZZO ECO	06
ATREZZO ELITE	08
ATREZZO SH402	12
ATREZZO SH406	18
ATREZZO 4 SEASONS	22
ATREZZO TOURING LS	24
ATREZZO TOURING WR	26
ATREZZO R01 SPORT	28
ATREZZO Z4+AS	30
ATREZZO ZSR	32
ATREZZO ZSR SUV	36
ATREZZO SVR LX	38
ATREZZO SVA1	42
TERRAMAX CVR	46
TERRAMAX H/T	48
TERRAMAX A/T	50
COMMERCIO VX1	54
COMMERCIO VX+	56
SL12	58
EXTMILE SL16	60
ENDURE WSL1	62
ICEBLAZER WSL2	64
ICEBLAZER WST1	66
ICEBLAZER WST2 LT	70
ICEBLAZER WST3	72
ATREZZO RUN-FLAT	74

ABBREVIATIONS

- P.R. = PLY RATING
- L.I. / S.R. = LOAD INDEX / SPEED RATING
- O.D. = OVERALL DIAMETER (MM)
- S.W. = SECTION WIDTH (MM)
- T.D. = TREAD DEPTH (MM)
- R.W. = RIM WIDTH (IN)
- S.L.R. = STATIC LOAD RADIUS
- L.C.C. = LOAD CARRYING CAPACITY

Speed Rating	Speed km/h	Speed Rating	Speed km/h
A1	5	K	110
A2	10	L	120
A3	15	M	130
A4	20	N	140
A5	25	P	150
A6	30	Q	160
A7	35	R	170
A8	40	S	180
B	50	T	190
C	60	H	210
E	70	V	240
F	80	W	270
G	90	Y	300
J	100		



MARKETING 2016



Sailun Tire is proud to announce their new partnership with the World Child Cancer Charity (WCC), an organization dedicated to the treatment of children with cancer in developing countries.

The inequality of diagnosing and treating children diagnosed with cancer between high and middle/ low income countries is astounding. 200,000 children develop cancer worldwide each year with 80% of those children being located in low or middle income countries with only a 5% survival rate, compared to the 80% in high income countries. These low survival rates are attributed to shortage of specifically trained doctors and nurses, poor diagnosis and mistaken belief that child cancer is too difficult to cure. The work that WCC does is to treat children with cancer in the areas where treatments are not easily available or affordable.



WCC's mission is to bring greater awareness to cancer, cancer diagnosis, treatment and palliative care. Their vision is to raise survival rates to between 50-60% by treating children with relatively simple protocols and inexpensive drugs. Projects such as Malawi, started in 2009, are already seeing such progress. They fund international twinning partnerships which link experienced pediatric oncologists, nurses and healthcare workers from world renowned child cancer units in developed countries to projects in South America, Cameroon, Malawi, Ghana, Bangladesh, Philippines and Myanmar.

In 2014 alone, WCC trained 850 healthcare workers, funded nine projects in 16 different countries and set up a new project, Wilms' Tumour Collaboration across six African countries. They also opened a new project in Myanmar after a successful partnership with the Financial Times and received their first government funding projects in Ghana and Bangladesh.

"We are small but ambitious and, with Sailun's help, we will be able to achieve our plans for 2015 and beyond. These plans include extending our project in the Philippines by creating more satellite centers; expanding our newest project in Myanmar; and continuing to work with the Department of International Development to invest further in our Ghana and Bangladesh projects.

We are extremely grateful for this support from Sailun and its network, and look forward to working with you this year to improve the chances of survival for children with cancer in the developing world."

<http://www.worldchildcancer.org>







HIGH PERFORMANCE TIRE


ATREZZO ECO



PERFORMANCE RATINGS:

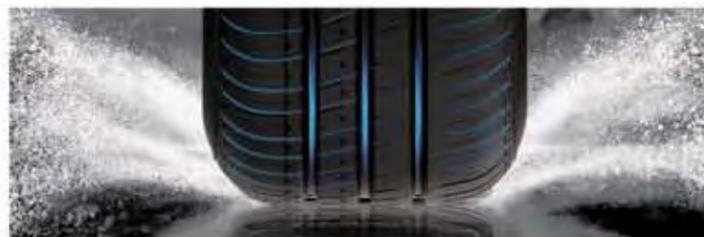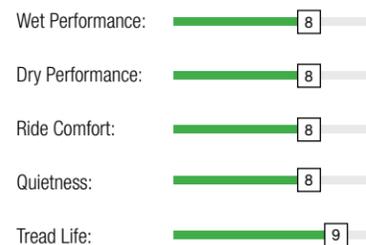

Three wide main grooves and small lateral grooves that run through the sidewall effectively enhance wet grip and improve hydroplaning resistance.

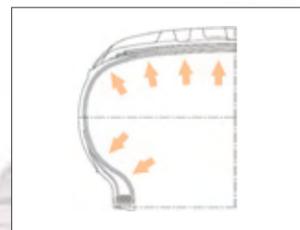

▶ Adjusted the internal structure of the tire to optimize the distribution of contact stress which improves comfort and lowers rolling resistance.



Added a lightning pattern in the tread for greater aesthetics.



Two center ribs and reinforced grooves help improve tire rigidity for excellent handling. Effectively reduces rolling resistance and improves fuel economy.



Solid large block shoulder design provides exceptional grip to ensure vehicle stability.

ATREZZO ECO



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
13	155/65R13	73T	532	157	7.4	4.5	360 AA
	165/65R13	77T	544	170	7.4	5.0	360 AA
	175/65R13	80T	558	177	7.4	5.0	360 AA
	155/70R13	75T	548	157	7.4	4.5	360 AA
	165/70R13	79T	562	170	7.4	5.0	360 AA
	175/70R13	82T	576	177	7.4	5.0	360 AA
	185/70R13	86T	590	189	7.4	5.5	360 AA
	155/80R13	79T	578	157	7.4	4.5	360 AA
	165/80R13	83T	594	165	7.4	4.5	360 AA
	165/60R14	75H	554	170	7.4	5.0	360 AA
14	165/60R14	75T	554	170	7.4	5.0	360 AA
	185/60R14	82H	578	189	7.4	5.5	360 AA
	155/65R14	75T	558	157	7.4	4.5	360 AA
	165/55R14	72V	538	170	7.4	5.0	360 AA
	165/65R14	79T	570	170	7.4	5.0	360 AA
	175/65R14	82T	584	177	7.4	5.0	360 AA
	175/65R14	82H	584	177	7.4	5.0	360 AA
	175/65R14	86T XL	584	177	7.4	5.0	360 AA
	185/65R14	86H	596	189	7.4	5.5	360 AA
	185/65R14	86T	596	189	7.4	5.5	360 AA
	195/65R14	89H	610	201	7.4	6.0	360 AA
	165/70R14	81T	588	170	7.4	5.0	360 AA
	165/70R14	85T XL	588	170	7.4	5.0	360 AA
	175/70R14	84T	602	177	7.4	5.0	360 AA
	175/70R14	88T XL	602	177	7.4	5.0	360 AA
	185/70R14	88T	616	189	7.4	5.5	360 AA
	185/70R14	88H	616	189	7.4	5.5	360 AA
	195/70R14	91H	630	201	7.4	6.0	360 AA
	175/80R14	88T	636	177	7.4	5.0	360 AA
	15	165/50R15	72V	547	170	7.4	5.0
165/55R15		75V	563	170	7.4	5.0	360 AA
155/60R15		74T	567	157	7.4	4.5	360 AA
175/60R15		81V	591	177	7.4	5.0	360 AA
175/60R15		81H	591	177	7.4	5.0	360 AA
175/55R15		77T	573	182	7.4	5.5	360 AA
145/65R15		72T	569	150	7.0	4.5	360 AA
165/65R15		81T	595	170	7.4	5.0	360 AA
165/65R15		81H	595	170	7.4	5.0	360 AA
175/65R15		84H	609	177	7.4	5.0	360 AA
175/65R15	88T XL	609	177	7.4	5.0	360 AA	
175/65R15	88H XL	609	177	7.4	5.0	360 AA	



ATREZZO ELITE



PERFORMANCE RATINGS:

Wet Performance: 9

Dry Performance: 9

Ride Comfort: 8

Quietness: 8

Tread Life: 8



Four wide main grooves and tread sipe design effectively drain water to improve wet grip.



Asymmetric tread design whose inner tread elements help provide efficient drainage, and the outer tread elements offer exceptional handling to obtain optimal driving performance.



A strip within the outer groove not only makes the outer block more robust, but also improves the handling performance. The design adds a special and attractive look to the tire.



Simple staggered layer groove design makes the pattern more dynamic.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
14	185/55R14	80H	560	194	7.4	6.0	360 AA
15	195/50R15	82H	577	201	7.7	6.0	360 AA
	195/50R15	82V	577	201	7.7	6.0	360 AA
	205/50R15	86V	587	214	7.7	6.5	360 AA
	185/55R15	82H	585	194	7.7	6.0	360 AA
	185/55R15	82V	585	194	7.7	6.0	360 AA
	195/55R15	85H	595	201	7.7	6.0	360 AA
	195/55R15	85V	595	201	7.7	6.0	360 AA
	205/55R15	88V	607	214	7.7	6.5	360 AA
	185/60R15	84H	603	189	7.7	5.5	360 AA
	185/60R15	84T	603	189	7.7	5.5	360 AA
	185/60R15	88H XL	603	189	7.7	5.5	360 AA
	185/60R15	88T XL	603	189	7.7	5.5	360 AA
	195/60R15	88H	615	201	7.7	6.0	360 AA
	195/60R15	88V	615	201	7.7	6.0	360 AA
	205/60R15	91H	627	209	7.7	6.0	360 AA
	205/60R15	91V	627	209	7.7	6.0	360 AA
	205/60R15	95H XL	627	209	7.7	6.0	360 AA
	185/65R15	88H	621	189	7.7	5.5	360 AA
	185/65R15	88T	621	189	7.7	5.5	360 AA
	185/65R15	92T XL	621	189	7.7	5.5	360 AA
	195/65R15	91H	635	201	7.7	6.0	360 AA
	195/65R15	91T	635	201	7.7	6.0	360 AA
	195/65R15	91V	635	201	7.7	6.0	360 AA
	195/65R15	95H XL	635	201	7.7	6.0	360 AA
	205/65R15	94H	647	209	7.7	6.0	360 AA
	205/65R15	94V	647	209	7.7	6.0	360 AA
	205/65R15	99T XL	647	209	7.7	6.0	360 AA
	215/65R15	96H	661	221	7.7	6.5	360 AA
	215/65R15	96T	661	221	7.7	6.5	360 AA
	215/65R15	100H XL	661	221	7.7	6.5	360 AA



ATREZZO ELITE

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
16	185/50R16	81V	592	194	7.7	6.0	360 AA
	195/50R16	84V	602	201	7.7	6.0	360 AA
	195/50R16	88V XL	602	201	7.7	6.0	360 AA
	195/50R16	84H	602	201	7.7	6.0	360 AA
	205/50R16	87V	612	214	7.7	6.5	360 AA
	225/50R16	96W XL	632	233	7.7	7.0	360 AA
	185/55R16	83H	610	194	7.7	6.0	360 AA
	185/55R16	83V	610	194	7.7	6.0	360 AA
	185/55R16	87V XL	610	194	7.7	6.0	360 AA
	195/55R16	87H	620	201	7.7	6.0	360 AA
	195/55R16	87V	620	201	7.7	6.0	360 AA
	195/55R16	91V XL	620	201	7.7	6.0	360 AA
	205/55R16	91H	632	214	7.7	6.5	360 AA
	205/55R16	91V	632	214	7.7	6.5	360 AA
	205/55R16	91W	632	214	7.7	6.5	360 AA
	205/55R16	94V XL	632	214	7.7	6.5	360 AA
	215/55R16	97H XL	642	226	7.7	7.0	360 AA
	215/55R16	97W XL	642	226	7.7	7.0	360 AA
	225/55R16	99V XL	654	233	7.7	7.0	360 AA
	195/60R16	89H	640	201	7.7	6.0	360 AA
	195/60R16	89V	640	201	7.7	6.0	360 AA

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
16	205/60R16	92H	652	209	7.7	6.0	360 AA
	205/60R16	92V	652	209	7.7	6.0	360 AA
	205/60R16	96H XL	652	209	7.7	6.0	360 AA
	205/60R16	96V XL	652	209	7.7	6.0	360 AA
	215/60R16	95H	664	221	7.7	6.5	360 AA
	215/60R16	95V	664	221	7.7	6.5	360 AA
	215/60R16	99H XL	664	221	7.7	6.5	360 AA
	215/60R16	99T XL	664	221	7.7	6.5	360 AA
	215/60R16	99V XL	664	221	7.7	6.5	360 AA
	225/60R16	98V	676	228	7.7	6.5	360 AA
	225/60R16	98W	676	228	7.7	6.5	360 AA
	225/60R16	102V XL	676	228	7.7	6.5	360 AA
	235/60R16	100W	688	240	7.7	7.0	360 AA
	195/65R16	92V	660	201	7.7	6.0	360 AA
	215/65R16	98H	686	221	7.7	6.5	360 AA
17	205/55R17	95V XL	658	214	7.7	6.5	360 AA
	235/55R17	99V	690	245	7.7	7.5	360 AA
	225/60R17	99V	702	228	7.7	6.5	360 AA
	235/60R17	102V	714	240	7.7	7.0	360 AA
18	215/55R18	99V XL	693	226	7.7	7.0	360 AA
	225/60R18	104W XL	727	228	7.7	6.5	360 AA



ALL-SEASON PERFORMANCE TIRE

ATREZZO SH402

PERFORMANCE RATINGS:



A performance all-season tire, the **ATREZZO SH402** provides exceptional tread life without compromising quality and comfort.

- All season compound designed for excellent handling in all weather conditions.
- High abrasion resistant formula enhances wear resistance for a longer tread life.
- Triplex tread compound delivers greater traction and uniform treadwear.



Wavy center rib:

Reduces noise generation when driving at high speeds and enhances driving stability.



Full depth multi-angle sipes:

Engineered for all-weather traction. Sipes reduce rolling resistance and improve uniform wear for a longer tread life.



High angle tread blocks:

Designed to extend the contact surface of the tire while the aggressive design improves grip.





ATREZZO SH402

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
13	155/65R13	73T	532	157	7.8	4.5	9.6	460 A B
	165/65R13	77T	544	170	7.8	5.0	9.8	460 A B
	175/65R13	80T	558	177	8.0	5.0	10.0	460 A B
	155/70R13	75T	548	157	7.6	4.5	9.8	460 A B
	165/70R13	79T	562	170	7.8	5.0	10.1	460 A B
	175/70R13	82T	576	177	8.0	5.0	10.3	460 A B
	185/70R13	86T	590	189	8.0	5.5	10.5	460 A B
	155/80R13	79T	578	157	7.8	4.5	10.3	460 A B
	165/80R13	83T	594	165	7.8	4.5	10.6	460 A B
	14	185/50R14	77V	542	194	8.0	6.0	9.9
185/55R14		80H	560	194	8.0	6.0	10.1	420 A A
165/60R14		75H	554	170	7.8	5.0	10.0	420 A A
185/60R14		82H	578	189	8.0	5.5	10.4	420 A A
195/60R14		86H	590	201	8.0	6.0	10.6	420 A A
155/65R14		75T	558	157	7.8	4.5	10.1	460 A B
165/65R14		79T	570	170	7.8	5.0	10.3	460 A B
175/65R14		82H	584	177	8.0	5.0	10.5	420 A A
175/65R14		82T	584	177	8.0	5.0	10.5	420 A A
175/65R14		86T XL	584	177	8.0	5.0	10.5	420 A A
185/65R14		86H	596	189	8.0	5.5	10.7	420 A A
185/65R14		86T	596	189	8.0	5.5	10.7	420 A A
195/65R14		89H	610	201	8.0	6.0	10.9	420 A A
155/70R14		77T	574	157	7.8	4.5	10.4	460 A B
165/70R14		81T	588	170	7.8	5.0	10.6	460 A B
165/70R14		85T XL	588	170	7.8	5.0	10.6	460 A B
175/70R14		84T	602	177	8.0	5.0	10.8	460 A B
175/70R14		88T XL	602	177	8.0	5.0	10.8	460 A B
175/70R14		84H	602	177	8.0	5.0	10.8	460 A B
185/70R14		88T	616	189	8.0	5.5	11.0	460 A B
185/70R14		88H	616	189	8.0	5.5	11.0	460 A B
195/70R14		91T	630	201	8.0	6.0	11.2	460 A B
195/70R14		91H	630	201	8.0	6.0	11.2	460 A B
205/70R14		95T	644	209	8.2	6.0	11.4	460 A B
175/80R14		88T	636	177	7.8	5.0	11.3	460 A B

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
15	195/50R15	82H	577	201	8.0	6.0	10.5	420 A A
	195/50R15	82V	577	201	8.0	6.0	10.5	420 A A
	205/50R15	86V	587	214	8.2	6.5	10.7	400 A A
	175/55R15	77T	573	182	8.0	5.5	10.5	460 A B
	185/55R15	82H	585	194	8.0	6.0	10.6	420 A A
	185/55R15	82V	585	194	8.0	6.0	10.6	420 A A
	195/55R15	85V	595	201	8.0	6.0	10.8	400 A A
	195/55R15	85H	595	201	8.0	6.0	10.8	400 A A
	185/60R15	84H	603	189	8.0	5.5	10.9	420 A A
	185/60R15	88H XL	603	189	8.0	5.5	10.9	420 A A
	195/60R15	88H	615	201	8.0	6.0	11.1	420 A A
	195/60R15	88V	615	201	8.0	6.0	11.1	420 A A
	205/60R15	91H	627	209	8.2	6.0	11.3	420 A A
	205/60R15	91V	627	209	8.2	6.0	11.3	420 A A
	205/60R15	95H XL	627	209	8.2	6.0	11.3	420 A A
	215/60R15	94H	639	221	8.2	6.5	11.5	420 A A
	225/60R15	96H	651	228	8.2	6.5	11.7	420 A A
	175/65R15	84T	609	177	8.0	5.0	11.0	420 A A
	175/65R15	84H	609	177	8.0	5.0	11.0	420 A A
	185/65R15	88H	621	189	8.0	5.5	11.2	420 A A
	185/65R15	88T	621	189	8.0	5.5	11.2	420 A A
	185/65R15	92T XL	621	189	8.0	5.5	11.2	420 A A
	195/65R15	91T	635	201	8.0	6.0	11.4	420 A A
	195/65R15	91H	635	201	8.0	6.0	11.4	420 A A
	195/65R15	95H XL	635	201	8.0	6.0	11.4	420 A A
	205/65R15	94H	647	209	8.2	6.0	11.6	420 A A
	205/65R15	94V	647	209	8.2	6.0	11.6	420 A A
	205/65R15	99T XL	647	209	8.2	6.0	11.6	420 A A
	215/65R15	96H	661	221	8.2	6.5	11.8	420 A A
	215/65R15	102H XL	661	221	8.2	6.5	11.8	420 A A



ATREZZO SH402

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
16	195/50R16	84H	602	201	8.0	6.0	11.0	420 AA
	195/50R16	84V	602	201	8.0	6.0	11.0	420 AA
	205/50R16	87V	612	214	8.2	6.5	11.2	460 AA
	225/50R16	92H	632	233	8.2	7.0	11.5	420 AA
	225/50R16	92V	632	233	8.2	7.0	11.5	420 AA
	245/50R16	97H	652	253	8.2	7.5	11.8	420 AA
	195/55R16	87H	620	201	8.0	6.0	11.3	420 AA
	195/55R16	87T	620	201	8.0	6.0	11.3	420 AA
	205/55R16	91V	632	214	8.2	6.5	11.5	420 AA
	205/55R16	91H	632	214	8.2	6.5	11.5	420 AA
	205/55R16	94V XL	632	214	8.2	6.5	11.5	420 AA
	215/55R16	97H XL	642	226	8.2	7.0	11.6	420 AA
	215/55R16	97V XL	642	226	8.2	7.0	11.6	420 AA
	225/55R16	99H XL	654	233	8.2	7.0	11.8	420 AA
	225/55R16	99V XL	654	233	8.2	7.0	11.8	420 AA
	195/60R16	89H	640	201	8.0	6.0	11.6	420 AA
	205/60R16	92V	652	209	8.2	6.0	11.4	420 AA
	205/60R16	92H	652	209	8.2	6.0	11.4	420 AA
	205/60R16	96V XL	652	209	8.2	6.0	11.4	420 AA
	215/60R16	95V	664	221	8.2	6.5	12.0	400 AA
	215/60R16	99H XL	664	221	8.2	6.5	12.0	400 AA
	215/60R16	99V XL	664	221	8.2	6.5	12.0	400 AA
	225/60R16	98H	676	228	8.2	6.5	12.1	420 AA
	225/60R16	102H XL	676	228	8.2	6.5	12.1	420 AA
	225/60R16	102V XL	676	228	8.2	6.5	12.1	420 AA
	205/65R16	95H	672	209	8.2	6.0	12.0	420 AA
	215/65R16	98T	686	221	8.2	6.5	12.3	460 A B
	225/65R16	100T	698	228	8.2	6.5	12.4	460 A B
	235/65R16	103T	712	240	8.2	7.0	12.6	460 A B

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
17	225/50R17	94V	658	233	8.2	7.0	11.9	420 AA
	215/55R17	94V	668	226	8.2	7.0	12.1	420 AA
	225/55R17	97H	680	233	8.2	7.0	12.2	420 AA
	215/60R17	96T	690	221	8.2	6.5	12.4	460 A B
	225/60R17	99T	702	228	8.2	6.5	12.6	460 A B
	215/65R17	99T	712	221	8.2	6.5	12.7	460 A B
	225/65R17	102T	724	228	8.2	6.5	12.9	460 A B
	225/65R17	102T	724	228	8.2	6.5	12.9	460 A B



ALL-SEASON PERFORMANCE TIRE

ATREZZO SH406

PERFORMANCE RATINGS:



Groove design:
Efficient water drainage and superior high speed stability.



Sipe design:
Improve head dispersion. Reduced noise emissions.



Reinforced shoulder:
Greater driving stability.
Improved durability for a longer tread life.







ALL-SEASON PERFORMANCE TIRE



ATREZZO SH406

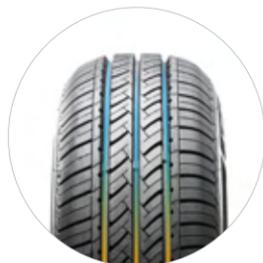

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
12	145/70R12	69S	509	150	7.4	4.5	9.1	460 A B
	155/70R12	73T	523	157	7.4	4.5	9.4	460 A B
	165/70R12	77T	537	170	7.8	5.0	9.6	460 A B
13	165/60R13	73H	528	170	7.8	5.0	9.5	420 A A
	155/65R13	73T	532	157	7.4	4.5	9.6	460 A B
	165/70R13	79T	562	170	7.8	5.0	10.1	460 A B
	155/80R13	79T	578	157	7.4	4.5	10.3	460 A B
	165/80R13	83T	594	165	7.8	4.5	10.6	460 A B
	155/55R14	69V	526	162	7.4	5.0	9.6	420 A A

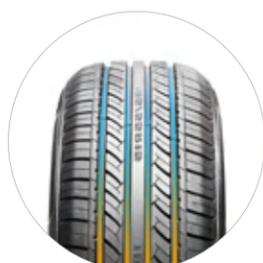

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
13	175/70R13	82T	576	177	7.8	5.0	10.3	460 A B
	185/70R13	86T	590	189	8.0	5.5	10.5	460 A B
14	165/55R14	72V	538	170	7.8	5.0	9.8	420 A A
	185/60R14	82H	578	189	8.0	5.5	10.4	420 A A
	195/60R14	86H	590	201	7.9	6.0	10.6	420 A A
	175/65R14	82T/H/86T	584	177	7.8	5.0	10.5	420 A A
	185/65R14	86T//H	596	189	8.0	5.5	10.7	420 A A
	175/70R14	84T/88T XL	602	177	7.8	5.0	10.8	460 A B
	185/70R14	88T/H	616	189	8.0	5.5	11.0	460 A B
	195/70R14	91T/H	630	201	8.0	6.0	11.2	460 A B
	205/70R14	95T	644	209	8.0	6.0	11.4	460 A B

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
15	165/50R15	72V	547	170	7.8	5.0	10.1	420 A A
	195/50R15	82H	577	201	8.0	6.0	10.5	420 A A
	165/55R15	75V	563	170	7.8	5.0	10.3	420 A A
	185/55R15	82H	585	194	8.0	6.0	10.6	420 A A
	195/55R15	85H/V	595	201	8.0	6.0	10.8	420 A A
	185/60R15	84H	603	189	7.4	5.5	10.9	420 A A
	195/60R15	88H	615	201	8.0	6.0	11.1	420 A A
	205/60R15	91H	627	209	8.0	6.0	11.3	420 A A
	215/60R15	94H	639	221	8.7	6.5	11.5	420 A A
	175/65R15	84H	609	177	7.0	5.0	11.0	420 A A
	185/65R15	88H	621	189	8.0	5.5	11.2	420 A A
	195/65R15	91T/H	635	201	8.0	6.0	11.4	420 A A
	205/65R15	94H	647	209	8.0	6.0	11.6	420 A A
	16	195/50R16	84V	602	201	7.9	6.0	11.0
205/50R16		87V	612	214	8.4	6.5	11.2	420 A A
225/50R16		92H	632	233	9.2	7.0	11.5	420 A A
195/55R16		87H	620	201	7.9	6.0	11.3	420 A A
205/55R16		91H/V	632	214	8.0	6.5	11.5	420 A A
215/55R16		97H	642	226	8.9	7.0	11.6	420 A A
225/55R16		99H XL	654	233	8.2	7.0	11.8	420 A A
205/60R16		92V	652	209	8.0	6.0	11.8	420 A A
215/60R16		95V	664	221	8.2	6.5	12.0	420 A A
225/60R16		98H	676	228	8.2	6.5	12.1	420 A A
205/65R16		95H	672	209	8.2	6J	12.1	420 A A
215/65R16		98T	686	221	8.7	6.5	12.3	420 A A
225/65R16		100T	698	228	8.2	6 1/2J	12.5	460 A B
235/65R16		103T	712	240	8.2	7J	12.7	460 A B
17	225/50R17	94V	658	233	9.2	7.0	12.0	420 A A
	215/55R17	94V	668	226	8.9	7.0	12.1	420 A A
	225/55R17	97V	680	233	9.2	7.0	12.3	420 A A
	215/60R17	96T	690	221	8.2	6 1/2J	12.5	460 A B
	225/60R17	99T	702	228	8.2	6 1/2J	12.7	460 A B
	215/65R17	99T	712	221	8.2	6 1/2J	12.8	460 A B
225/65R17	102T	724	228	8.2	6 1/2J	13.0	460 A B	




ALL-SEASON PERFORMANCE TIRE

ATREZZO 4 SEASONS



PERFORMANCE RATINGS:

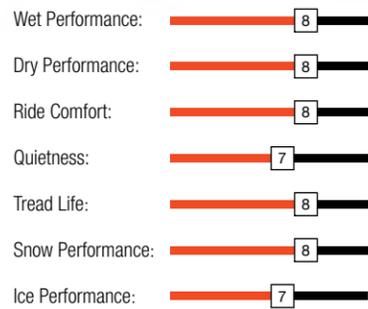


The unique 4 season asymmetric pattern is designed for use all year round.

Zigzag sipe and block design maximize grip in water and snow. The three main grooves quickly and effectively drain water and snow for a safer drive.



1 Dry handling performance is enhanced due to the strong square block pattern on the outside.



2 Newly introduced 3-Dimensional grooves and sipes ensure optimal performance for the entire life of the tire.


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	185/60R14	82H	578	189	8.5	5.5
	175/65R14	82T	584	177	8.5	5.0
	185/65R14	86T	596	189	8.5	5.5
	165/70R14	81T	588	170	8.0	5.0
15	185/55R15	82H	585	194	8.5	6.0
	195/55R15	85H	595	201	8.5	6.0
	185/60R15	88HXL	603	189	8.5	5.5
	195/60R15	88H	615	201	8.5	6.0
	175/65R15	88HXL	609	177	8.5	5.0
	185/65R15	88T	621	189	8.5	5.5
	185/65R15	92HXL	621	189	8.5	5.5
	195/65R15	91H	635	201	8.5	6.0
	195/65R15	95T XL	635	201	8.5	6.0
	195/65R15	91T	635	201	8.5	6.0
	16	195/55R16	87V	620	201	8.5
195/55R16		91VXL	620	201	8.5	6.0
205/55R16		91H	632	214	8.5	6.5
205/55R16		94H XL	632	214	8.5	6.5
215/55R16		93H	642	226	8.5	7.0
215/55R16		97VXL	642	226	8.5	7.0
225/55R16		99VXL	654	233	8.5	7.0
205/60R16		96VXL	652	209	8.5	6.0
215/60R16		99H XL	664	221	8.5	6.5
17	225/45R17	94V XL	634	225	8.5	7.5



ALL-SEASON PERFORMANCE TIRE

ATREZZO TOURING LS

PERFORMANCE RATINGS:

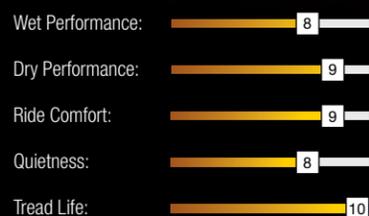

The **TOURING LS** is designed with comfort in mind, and engineered to go the distance. The Touring LS provides exceptional handling in both dry and wet weather conditions, while delivering all-season performance and value.

- All-season compound designed for optimal comfort and grip.
- Special compound formulation for enhanced durability and maximum tread life.



1 Siping Angles:

Reduces noise generated when traveling at high speeds and enhances driving stability.

2 Variable pitch design:

Optimized to ensure a quiet and smooth ride.

3 Large contact area:

Wide, solid footprint for exceptional handling and driver control.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG	
13	165/65R13	77T	544	170	7.8	5.0	9.6	640/A/B	
	165/65R13	77T	544	170	7.8	5.0	9.8	640 A B	
	175/60R13	77T	540	177	8.7	5.0	9.7	640/A/B	
	185/70R13	86T	590	189	8	5.5	10.5	640 A B	
	185/70R13	86T	590	189	8.0	5.5	10.5	640/A/B	
14	205/60R14	88H	602	209	8.0	6.0	11.0	500/A/A	
	185/65R14	86T	596	189	8.0	5.5	10.7	640/A/B	
	195/70R14	91T	630	201	8.0	6.0	11.2	640/A/B	
	15	185/60R15	84T	603	189	8.0	5.5	10.9	640/A/B
195/60R15		88T	615	201	8.0	6.0	11.1	640/A/B	
205/60R15		91T	627	209	8.2	6.0	11.3	640/A/B	
215/60R15		94T	639	221	8.2	6.5	11.5	640/A/B	
185/65R15		88T	621	189	8.0	5.5	11.2	640/A/B	
195/65R15		91T	635	201	8.0	6.0	11.4	640/A/B	
205/65R15		94T	647	209	8.2	6.0	11.6	640/A/B	
215/65R15		96T	661	221	8.2	6.5	11.8	640/A/B	
205/70R15		96T	669	209	8.2	6.0	11.9	640/A/B	
215/70R15		98T	683	221	8.2	6.5	12.1	640/A/B	
225/70R15		100T	697	228	8.2	6.5	12.4	640/A/B	
16	205/55R16	91H	632	214	8.2	6.5	11.5	540/A/A	
	205/60R16	92H	652	209	8.2	6.0	11.4	540/A/A	
	215/60R16	95H	664	221	8.2	6.5	12.0	640/A/B	
	215/60R16	95T	664	221	8.2	6.5	12.0	640/A/B	
	215/60R16	95H	664	221	8.2	6.5	12.0	640 A B	
	225/60R16	98T	676	228	8.2	6.5	12.1	640/A/B	
	215/65R16	98T	686	221	8.2	6.5	12.3	640/A/B	
	235/65R16	103T	712	240	8.2	7.0	12.7	640/A/B	
	17	225/55R17	97T	680	233	8.2	7.0	12.3	640/A/B
		215/60R17	96T	690	221	8.2	6.5	12.5	640/A/B
225/60R17		99T	702	228	8.2	6.5	12.6	640/A/B	
235/60R17		102T	714	240	8.2	7.0	13.0	640/A/B	
235/60R17		102T	714	240	8.2	7.0	12.8	460/A/B	
215/65R17		99T	712	221	8.2	6.5	12.8	640/A/B	
225/65R17		102T	724	228	8.2	6.5	13.0	640/A/B	
245/65R17		107T	750	248	8.2	7.0	13.4	640/A/B	



ALL-SEASON PERFORMANCE TIRE


ATREZZO TOURING WR

PERFORMANCE RATINGS:



The **TOURING WR** is designed with comfort in mind, and engineered to go the distance. The Touring LS provides exceptional handling in both dry and wet weather conditions, while delivering all-season performance and value.

- All-season compound designed for optimal comfort and road holding capability.
- Special compound formulation for enhanced durability and maximum tread life.

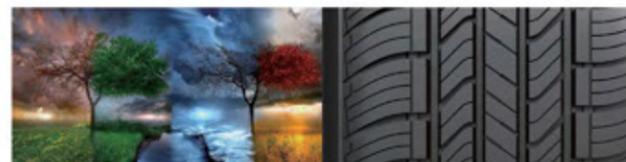

- 1 Large contact area:**
Wide, solid footprint for exceptional handling and driver control.
- 2 Variable pitch design:**
Optimized to ensure a quiet and smooth ride.
- 3 Variable angle siping:**
Reduces road noise at higher speeds and enhances directional stability.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
13	175/60R13	77T	540	177	7.8	5.0	9.7	640 A B
	185/60R13	80T	552	189	8.0	5.5	9.9	640 A B
	165/65R13	77T	544	170	7.8	5.0	9.8	640 A B
	175/70R13	82T	576	177	7.8	5.0	10.3	640 A B
	185/70R13	86T	590	189	8.0	5.5	10.5	640 A B
	165/80R13	83T	594	165	7.8	4.5	10.6	640 A B
14	205/60R14	88H	602	209	8.0	6.0	10.8	500 A A
	185/65R14	86H	596	189	8.0	5.5	10.7	500 A A
	185/70R14	88T	616	189	8.0	5.5	11.0	640 A B
15	205/70R15	96T	669	209	8.0	6.0	11.9	640 A B
	215/70R15	98T	683	221	8.2	6.5	12.1	640 A B
	225/70R15	100T	697	228	8.2	6.5	12.4	640 A B
	215/75R15	100T	703	216	8.2	6.0	12.4	640 A B
	225/75R15	102S	719	223	8.2	6.0	12.7	640 A B
	235/75R15	105T	733	235	8.2	6.5	12.9	640 A B




ULTRA HIGH PERFORMANCE TIRE

ATREZZO

RO1 SPORT

PERFORMANCE RATINGS:

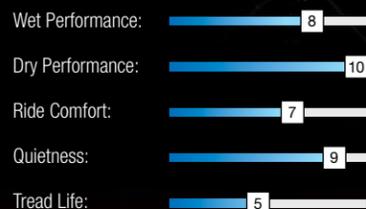

ATREZZO RO1 SPORT

- ▶ The normal operating state of the tire has good dry and wet performance to meet normal usage needs. Reaching other higher operating temperatures, the softened tread becomes highly viscous, in turn improving grip performance to meet competition requirements.
- ▶ Specialized tread compounds which are designed to work best in racing conditions.



- 1 Widened tread and wave-like central rib design ensure greater high speed stability.
- 2 Sleek and wide shoulder grooves effectively drain water.
- 3 Big shoulder blocks improve stability and handling to meet performance needs.



High-end product with unique sidewall design; employs curved incisions which fully reflects its sporty and urban look.

Curved grooves improve abrasion resistance and the rounded corners on the tread block edges protects the tire from damage.



Special rubber formulation improves tire strength and grip.

	Size	LI	SR	P.R.	O.D. mm	S.W. mm	R.W. inch	S.L.R inch	UTQG
15	195/50R15	82	V	STD	577	201	6.0	11.0	180 AA A
	195/55R15	89	V	XL	595	201	6.0	10.8	180 AA A
17	215/45ZR17	91	W	XL	626	213	7.0	11.5	180 AA A
18	265/35R18	97	W	XL	643	271	9.5	12.0	180 AA A
	235/40R18	95	W	XL	645	241	8.5	12.0	180 AA A
	225/40ZR18	95	W	XL	637	230	8.0	11.8	180 AA A
	255/55R18	109	V	XL	737	265	8.0	13.3	180 AA A



ULTRA HIGH PERFORMANCE TIRE

ATREZZO Z4+AS

PERFORMANCE RATINGS:

Wet Performance: 9

Dry Performance: 9

Ride Comfort: 8

Quietness: 8

Tread Life: 8



The **ATREZZO Z4+AS** is an ultra-high performance all-season tire, designed to perform in any weather condition. Engineered for high speed performance, cornering, and braking, the Z4+AS lets you get more out of your vehicle.

- Optimized to deliver a balance between ultra-high performance needs and the comfort of everyday driving in all weather conditions
- The specially design tread compounds maximize grip and handling in dry weather while also ensuring uniform wear.



► High angle V-shaped tread grooves:

Aggressive high angle grooves enhance water drainage to improve wet handling and hydroplane resistance.



Tread block grooves:

Reinforce block stiffness to promote even load distribution, handling, and uniform wear. Designed to reduce noise emissions for a more comfortable and quiet ride.




Tapered tread edges:

Promotes uniform contact pressure for improved stability.


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG	
15	195/50R15	82V	577	201	8.2	6.0	10.5	380 AA A	
	16	205/50ZR16	87W	612	214	8.2	6.5	11.2	380 AA A
		225/50ZR16	92W	632	233	8.2	7.0	11.5	380 AA A
		205/55ZR16	91W	632	214	8.3	6.5	11.5	380 AA A
		215/55ZR16	97W XL	642	226	8.2	7.0	11.6	380 AA A
225/55ZR16		99W XL	654	233	8.2	7.0	11.8	380 AA A	
17	205/40ZR17	84W XL	596	212	8.2	7.5	11.0	380 AA A	
	245/40ZR17	95W XL	628	248	8.2	8.5	11.5	380 AA A	
	205/45ZR17	88W XL	616	206	8.2	7.0	11.3	380 AA A	
	215/45ZR17	91W XL	626	213	8.0	7.0	11.5	380 AA A	
	225/45ZR17	94W XL	634	225	8.2	7.5	11.6	380 AA A	
	235/45ZR17	97W XL	644	236	8.2	8.0	11.8	380 AA A	
	245/45ZR17	99W XL	652	243	8.2	8.0	11.9	380 AA A	
	205/50ZR17	93W XL	638	214	8.2	6.5	11.7	380 AA A	
	215/50ZR17	95W XL	648	226	8.2	7.0	11.8	380 AA A	
	225/50ZR17	98W XL	658	233	8.2	7.0	12.0	380 AA A	
	215/55ZR17	98W XL	668	226	8.2	7.0	12.1	380 AA A	
	225/55ZR17	101W XL	680	233	8.2	7.0	12.3	380 AA A	
	235/55ZR17	99W	690	245	8.2	7.5	12.5	380 AA A	
	18	215/35ZR18	84W XL	607	218	8.0	7.5	11.3	380 AA A
		225/40ZR18	92W XL	637	230	8.2	8.0	11.8	380 AA A
235/40ZR18		95W XL	645	241	8.2	8.5	11.9	380 AA A	
245/40ZR18		97W XL	653	248	8.2	8.5	12.0	380 AA A	
225/45ZR18		95W XL	659	225	8.2	7.5	12.1	380 AA A	
245/45ZR18		100W XL	677	243	8.2	8.0	12.4	380 AA A	
255/45ZR18		103W XL	687	255	8.2	8.5	12.5	380 AA A	
235/50ZR18		101W XL	693	245	8.2	7.5	12.6	380 AA A	
19		245/40ZR19	98W XL	679	248	8.2	8.5	12.5	380 AA A
	245/45ZR19	98W	703	243	8.2	8.0	12.9	380 AA A	
20	245/35ZR20	95W XL	680	248	8.2	8.5	12.6	380 AA A	
	255/35ZR20	97W XL	686	260	8.2	9.0	12.7	380 AA A	
	245/45ZR20	103W XL	728	243	8.2	8.0	13.4	380 AA A	



ATREZZO ZSR

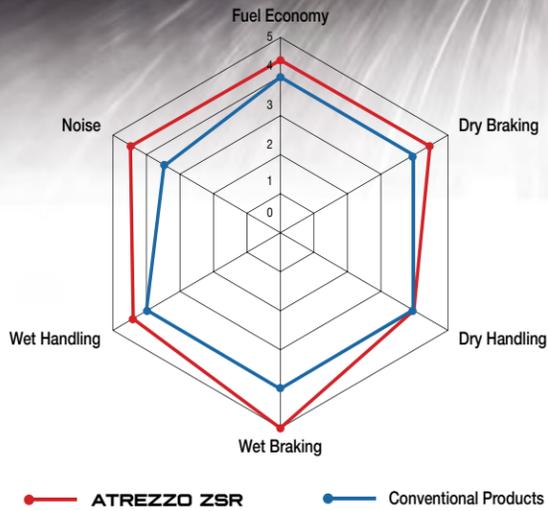

PERFORMANCE RATINGS:

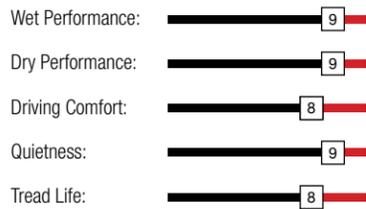

The new generation **ATREZZO ZSR** is engineered to deliver precise wet and dry handling performance. With an asymmetrical tread design and enhanced tread rubber formula, Atrezzo ZSR rises to the challenge and provides exceptional performance on the street and on the highway.

- Asymmetrical tread design for uncompromising performance.
- Wide shoulder blocks and high angle sipes improve high speed performance.
- Variable pitch tread design provides a smooth, quiet ride.
- Advanced tread compound delivers superior cornering and exceptional handling.
- Deep, circumferential grooves and hundreds of biting edges deliver excellent wet and dry traction.



Excellent Drainage Performance
Grooves with varying widths efficiently drain water to reduce hydroplaning and improve fuel efficiency.



Noise Emission
The various groove angles evenly distribute vibrations generated while running to reduce noise emissions. The design has been measured to reduce noise emissions by about 3%.



Longer Tread Life
Through our testing, we have ensured greater driving stability and promoted uniform wear by increasing the tire's ground contact area by 6%.

High Speed Stability
The central rib pattern improves high speed stability to improve driving comfort.

Cornering
The reinforced shoulder design improves grip for effective corner capabilities.




1 Special tread compound formula reduces rolling resistance and improves skid resistance.

White Carbon Black Filler




White carbon black sticks better to the body of the tire which creates less friction. This greatly reduces the tire's rolling resistance. White carbon black is more flexible making it better at absorbing shocks from road deformations and improves grip.

Carbon Black Filler

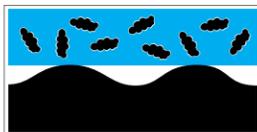

2 Main tread rubber material greatly improves hydroplaning resistance to provide you with a safer ride.

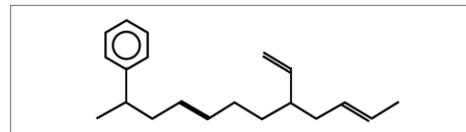

High content of Styrene Vinyl which provides great hydroplaning resistance.

ATTEZZO ZSR Formula Intro

Rolling Resistance



Skid Resistnace





ATREZZO ZSR

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG	
15	195/45R15	78V	557	195	8.0	6.5	10.2	340 AA	
16	195/40ZR16	80W XL	562	200	8.2	7.0	10.4	340 AA	
	195/45R16	84V XL	582	195	8.0	6.5	10.7	340 AA	
	205/45R16	87V XL	590	206	8.2	7.0	10.8	340 AA	
	205/45R16	87W XL	590	206	8.2	7.0	10.8	340 AA	
	205/50ZR16	87W	612	214	8.2	6.5	11.2	340 AA	
	205/55ZR16	91W	632	214	8.3	6.5	11.5	340 AA	
	215/55ZR16	97W XL	642	226	8.2	7.0	11.6	340 AA	
	225/55ZR16	99W XL	654	233	8.2	7.0	11.8	340 AA	
	17	215/35ZR17	83W XL	582	218	8.2	7.5	10.8	340 AA
		195/40R17	81V XL	588	200	8.2	7.0	10.9	340 AA
205/40ZR17		84W XL	596	212	8.2	7.5	11.0	340 AA	
215/40ZR17		87W XL	604	218	8.0	7.5	11.1	340 AA	
245/40ZR17		95W XL	628	248	8.2	8.5	11.5	340 AA	
205/45ZR17		88W XL	616	206	8.2	7.0	11.3	340 AA	
215/45ZR17		91W XL	626	213	8.0	7.0	11.5	340 AA	
225/45ZR17		94W XL	634	225	8.2	7.5	11.6	340 AA	
235/45ZR17		97W XL	644	236	8.2	8.0	11.8	340 AA	
245/45ZR17		99Y XL	652	243	8.2	8.0	11.9	340 AA	
205/50ZR17		93W XL	638	214	8.2	6.5	11.7	340 AA	
215/50ZR17		95W XL	648	226	8.2	7.0	11.8	340 AA	
215/50R17		95V XL	648	226	8.2	7.0	11.8	340 AA	
225/50ZR17		98W XL	658	233	8.2	7.0	12.0	340 AA	
215/55ZR17		98W XL	668	226	8.2	7.0	12.1	340 AA	
225/55ZR17		101W XL	680	233	8.2	7.0	12.3	340 AA	
225/55R17		101V XL	680	233	8.2	7.0	12.3	340 AA	
18		215/35ZR18	84W XL	607	218	8.0	7.5	11.3	340 AA
		225/35R18	87W XL	615	230	8.2	8.0	11.4	340 AA
		255/35ZR18	94W XL	635	260	8.2	9.0	11.7	340 AA
	265/35R18	93W	643	271	8.2	9.5	11.9	340 AA	
	215/40R18	89V XL	629	218	8.0	7.5	11.6	340 AA	
	225/40ZR18	92W XL	637	230	8.2	8.0	11.8	340 AA	

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
18	235/40ZR18	95W XL	645	241	8.2	8.5	11.9	340 AA
	235/40ZR18	95Y XL	645	241	8.2	8 1/2J	11.9	340 AA
	245/40ZR18	97Y XL	653	248	8.2	8.5	12.0	340 AA
	215/45R18	93W XL	651	213	8.2	7.0	12.0	340 AA
	215/45ZR18	93Y XL	651	213	8.2	7J	12.0	340 AA
	225/45ZR18	95Y XL	659	225	8.2	7 1/2J	12.1	340 AA
	225/45ZR18	95W XL	659	225	8.2	7.5	12.1	340 AA
	235/45ZR18	98W XL	669	236	8.2	8.0	12.3	340 AA
	245/45ZR18	100W XL	677	243	8.2	8.0	12.4	340 AA
	255/45ZR18	103W XL	687	255	8.2	8.5	12.5	340 AA
	225/50R18	95W	683	233	8.2	7.0	12.5	340 AA
	235/50ZR18	101Y XL	693	245	8.2	7 1/2J	12.6	340 AA
	235/50ZR18	101W XL	693	245	8.2	7.5	12.6	340 AA
	19	275/30ZR19	96W XL	649	278	8.2	9.5	12.0
275/30ZR19		96Y XL	649	278	8.2	9 1/2J	12.1	340 AA
215/35ZR19		85W XL	633	218	8.2	7.5	11.8	340 AA
215/35ZR19		85Y XL	633	218	8.2	7 1/2J	11.8	340 AA
225/35ZR19		88W XL	641	230	8.2	8.0	11.9	340 AA
235/35ZR19		91W XL	647	241	8.2	8.5	12.0	340 AA
245/35ZR19		93W XL	655	248	8.2	8.5	12.1	340 AA
255/35ZR19		96Y XL	661	260	8.2	9.0	12.2	340 AA
275/35ZR19		96W	675	278	8.2	9.5	12.5	340 AA
245/40ZR19		98W XL	679	248	8.2	8.5	12.5	340 AA
235/55ZR19		105W XL	741	245	8.2	7.5	13.6	340 AA
20	275/30ZR20	97W XL	674	278	8.2	9.5	12.6	340 AA
	275/30ZR20	97Y XL	674	278	8.2	9 1/2J	12.6	340 AA
	225/35ZR20	90W XL	666	230	8.2	8.0	12.4	340 AA
	225/35ZR20	90Y XL	666	230	8.2	8J	12.4	340 AA
	245/35ZR20	95W XL	680	248	8.2	8.5	12.6	340 AA
	245/35ZR20	95Y XL	680	248	8.2	8 1/2J	12.6	340 AA
	255/35ZR20	97Y XL	686	260	8.2	9J	12.7	340 AA
	255/35ZR20	97W XL	686	260	8.2	9.0	12.7	340 AA



ULTRA HIGH PERFORMANCE SUV TIRE

ATREZZO ZSR SUV

PERFORMANCE RATINGS:



ATREZZO ZSR SUV

Special Tred Compound

The tread formula effectively improves wet driving capabilities and improve rolling resistance for improved fuel efficiency.



Comfortable Ride

Groove pattern improves driving stability and works with the optimized variable pitch arrangement to reduce noise emissions.

Asymmetric Pattern for Balanced Performance

The asymmetric pattern design boasts two strengths; the inner sidewall is adept at draining water to increase wet performance, and outside sidewall with its large tread blocks improves grip while cornering.



High Speed Performance

Widened tread surface design; when in contact with the ground the specially structured crown evenly distributes force to achieve precise control at high speeds.


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
18	235/60R18	107V	739	240	8.0	7.0	340 AA
19	235/45ZR19	99Y	695	236	7.7	8.0	340 AA
	255/50ZR19	107Y	739	265	8.0	8.0	340 AA
20	275/40ZR20	106Y	728	278	7.7	9.5	340 AA
	255/50ZR20	109Y	764	265	8.0	8.0	340 AA
	255/55ZR20	110Y	788	265	8.0	8.0	340 AA
21	295/35ZR21	107Y	739	301	7.7	10.5	340 AA
	275/45ZR21	110Y	781	273	7.7	9.0	340 AA
22	275/40ZR22	108Y	779	278	7.7	9.5	340 AA
	295/40ZR22	112Y	795	301	7.7	10.5	340 AA



ULTRA HIGH PERFORMANCE SUV TIRE

ATREZZO SVR LX

PERFORMANCE RATINGS:

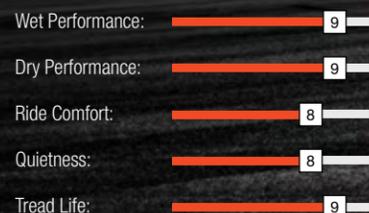

In 2011, the series was selected by the global automotive media to be awarded the

"SEMA 2011 Best New Product Award."

They also won the China domestic tire brand award for the first time.



Groove Design

All grooves are slightly inclined to effectively funnel water out of the tire for improve hydroplaning resistance.




Shoulder Grooves


The variable pitch design on the shoulder grooves and the sipes improve grip and handling for all seasons. They also effectively reduce noise emissions for improved driving comfort.

The **ATREZZO SVR LX** is a premium high-performance tire designed for SUV and crossover vehicles. An advanced tread design with a sporty look, the SVR LX accentuates the appearance of your ride, while providing exceptional all-season performance, comfort, and tread life.

- Perfect balance of style, luxury, and all-season performance.
- Available in stylish 20"-24" sizes with M+S ratings for a wide range of OE and plus-size fitments.

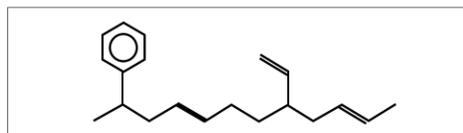

- 1 The tread formula compounds ensure excellent wear resistance for greater fuel economy.
- 2 The specialized formula also substantially increases wet grip.

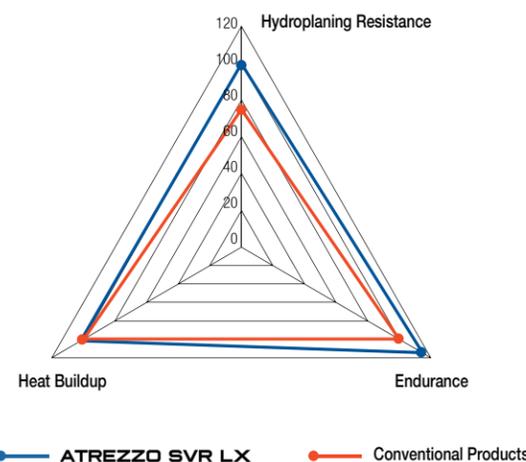

SVR LX

Directional Tread Pattern

The uniform V-shaped tread pattern design provides excellent grip, handling, and high speed performance in both dry and wet conditions. Efficiently drains water for a safer driving experience.

Sipe Design

The unique sipe design on the shoulder provides better stability on dry and wet roads as well as effectively reduces noise emissions.





HIGH PERFORMANCE SUV TIRE

ATREZZO SVR LX




	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	UTQG
20	275/40R20	106W	XL	728	278	9.5	9.5	2094@50	420 AA
	255/45R20	105V	XL	738	255	9.5	8.5	2039@50	420 AA
	275/45R20	110V	XL	756	273	9.5	9.0	2337@50	420 AA
	295/45R20	114V	XL	774	296	9.5	10.0	2601@50	420 AA
	265/50R20	111V	XL	774	277	9.5	8.5	2403@50	420 AA
	285/50R20	116V	XL	794	297	9.5	9.0	2756@50	420 AA
	305/50R20	120V	XL	814	316	9.5	9.5	3086@50	420 AA
	275/55R20	117V	XL	810	284	9.5	8.5	2833@50	420 AA
	275/60R20	119S	XL	838	279	9.5	8.0	2998@50	420 AA

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	UTQG
22	255/30R22	95V	XL	713	260	9.5	9.0	1521@50	420 AA
	265/35R22	102W	XL	745	271	9.5	9.5	1874@50	420 AA
	265/40R22	106V	XL	771	271	9.5	9.5	2094@50	420 AA
	305/40R22	114V	XL	803	313	9.5	11.0	2601@50	420 AA
	305/45R22	118V	XL	833	303	9.5	10.0	2910@50	420 AA
24	295/35R24	110V	XL	816	301	9.5	10.5	2337@50	420 AA
	305/35R24	112V	XL	824	313	9.5	11.0	2469@50	420 AA
	285/40R24	112V	XL	838	290	9.5	10.0	2469@50	420 AA
	295/40R24	114V	XL	846	301	9.5	10.5	2601@50	420 AA



ATREZZO SVA1

PERFORMANCE RATINGS:

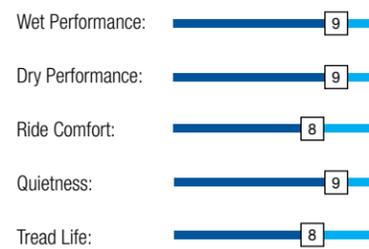

Asymmetrical Tread Pattern:

Provides excellent cornering stability while maintaining superior wet traction.

Groove Design:

Efficiently drains water for safer driving on wet roads.



Shoulder Groove Design:

Wave-like design on the shoulder helps reduce noise emissions and increases cornering capabilities.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
15	195/45R15	78V	557	195	8.0	6.5	10.2	340 AA
	195/50R15	82H	577	201	8.0	6.0	10.5	340 AA
	195/50R15	82V	577	201	8.0	6.0	10.5	340 AA
	195/55R15	85H	595	201	8.0	6.0	10.8	340 AA
	195/55R15	85V	595	201	8.0	6.0	10.8	340 AA
16	195/45R16	84V	582	195	8.0	6.5	10.7	340 AA
	205/45R16	87V	590	206	8.0	7.0	10.8	340 AA
	205/50R16	87W	612	214	8.0	6.5	11.2	340 AA
	195/50R16	88V	602	201	8.0	6.0	11.0	340 AA
	205/50R16	87V	612	214	8.0	6.5	11.2	340 AA
	205/55R16	91W	632	214	8.0	6.5	11.5	340 AA
	205/55R16	91H	632	214	8.0	6.5	11.5	340 AA
	205/55R16	91V	632	214	8.0	6.5	11.5	340 AA
	205/55R16	94V	632	214	8.0	6.5	11.5	340 AA
	17	195/40R17	81H	588	200	8.0	7.0	10.9
195/45R17		85V	608	195	8.0	6.5	11.2	340 AA
215/50R17		95W	648	226	8.2	7.0	11.8	340 AA
215/50R17		95V	648	226	8.2	7.0	11.8	340 AA
225/55R17		101V	680	233	8.2	7.0	12.3	340 AA
235/55R17		103H	690	245	8.2	7.5	12.5	340 AA
18		215/40R18	89H	629	218	8.0	7.5	11.6
	225/55R18	98W	705	233	8.2	7.0	12.8	340 AA
	225/55R18	98V	705	233	8.2	7.0	12.8	340 AA
19	255/50R19	107W	739	265	8.5	8.0	13.4	340 AA
	255/50R19	107V	739	265	8.5	8.0	13.4	340 AA
20	265/50R20	111V	774	277	8.5	8.5	14.1	340 AA
	265/50R20	111W	774	277	8.5	8.5	14.1	340 AA



ATREZZO SVA1

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
16	205/45ZR16	87W	590	206	8.0	7.0	10.8	340 AA
	215/55ZR16	97W	642	226	8.2	7.0	11.6	340 AA
	225/55ZR16	99W	654	233	8.2	7.0	11.8	340 AA
17	195/40ZR17	81W	588	200	8.0	7.0	10.9	340 AA
	205/40ZR17	84W	596	212	8.0	7.5	11.0	340 AA
	215/40ZR17	87W	604	218	8.0	7.5	11.1	340 AA
	245/40ZR17	95W	628	248	8.2	8.5	11.5	340 AA
	205/45ZR17	88W	616	206	8.0	7.0	11.3	340 AA
	215/45ZR17	91W	626	213	8.2	7.0	11.5	340 AA
	225/45ZR17	94W	634	225	8.2	7.5	11.6	340 AA
	235/45ZR17	97W	644	236	8.2	8.0	11.8	340 AA
	245/45ZR17	99W	652	243	8.2	8.0	11.9	340 AA
	205/50ZR17	93W	638	214	8.0	6.5	11.7	340 AA
	225/50ZR17	98W	658	233	8.2	7.0	12.0	340 AA
	235/50ZR17	96W	668	245	8.2	7.5	12.1	340 AA
	215/55ZR17	98W	668	226	8.2	7.0	12.1	340 AA
	225/55ZR17	101W	680	233	8.2	7.0	12.3	340 AA
	235/55ZR17	103W	690	245	8.2	7.5	12.5	340 AA
18	215/35ZR18	84W	607	218	8.0	7.5	11.3	340 AA
	255/35ZR18	94W	635	260	8.2	9.0	11.7	340 AA
	265/35ZR18	97Y	643	271	8.2	9.5	11.9	340 AA
	215/40ZR18	89W	629	218	8.0	7.5	11.6	340 AA
	225/40ZR18	92W	637	230	8.2	8.0	11.8	340 AA
	235/40ZR18	95W	645	241	8.2	8.5	11.9	340 AA
	245/40ZR18	97Y	653	248	8.2	8.5	12.0	340 AA
	225/45ZR18	95W	659	225	8.2	7.5	12.1	340 AA
	245/45ZR18	100W	677	243	8.2	8.0	12.4	340 AA
	255/45ZR18	103W	687	255	8.5	8.5	12.5	340 AA
	235/50ZR18	97W	693	245	8.2	7.5	12.6	340 AA
	245/50ZR18	104Y	703	253	8.2	7.5	12.8	340 AA

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	S.L.R. inch	UTQG
19	265/30ZR19	93Y	643	271	8.2	9.5	12.0	340 AA
	275/30ZR19	96Y	649	278	8.2	9.5	12.1	340 AA
	225/35ZR19	88W	641	230	8.2	8.0	11.9	340 AA
	235/35ZR19	91W	647	241	8.2	8.5	12.0	340 AA
	245/35ZR19	93W	655	248	8.2	8.5	12.1	340 AA
	275/35ZR19	96Y	675	278	8.2	9.5	12.5	340 AA
	275/35ZR19	100W	675	278	8.2	9.5	12.5	340 AA
	255/35ZR19	96W	661	260	8.2	9.0	12.2	340 AA
	225/40ZR19	93Y	663	230	8.2	8.0	12.3	340 AA
	275/40ZR19	105Y	703	278	8.5	9.5	12.9	340 AA
	275/45ZR19	108Y	731	273	8.5	9.0	13.3	340 AA
	245/40ZR19	98Y	679	248	8.2	8.5	12.5	340 AA
	245/45ZR19	98W	703	243	8.2	8.0	12.9	340 AA
20	225/30ZR20	85Y	644	230	8.2	8.0	12.1	340 AA
	235/30ZR20	88W	650	242	8.2	8.5	12.2	340 AA
	245/30ZR20	90W	656	248	8.2	8.5	12.3	340 AA
	275/30ZR20	97W	674	278	8.2	9.5	12.5	340 AA
	225/35ZR20	90W	666	230	8.2	8.0	12.4	340 AA
	245/35ZR20	95W	680	248	8.2	8.5	12.6	340 AA
	255/35ZR20	97W	686	260	8.2	9.0	12.7	340 AA
	245/40ZR20	99Y	704	248	8.2	8.5	13.0	340 AA
	275/40ZR20	106W	728	278	8.5	9.5	13.4	340 AA
	245/45ZR20	103W	728	243	8.2	8.0	13.4	340 AA
255/45ZR20	105W	738	255	8.5	8.5	13.5	340 AA	



TERRAMAX CVR



PERFORMANCE RATINGS:




The **TERRAMAX CVR** is an all-season tire specifically engineered for SUV and crossovers. The CVR delivers exceptional handling and stability for today's crossover vehicles without compromising ride comfort.

- Smooth and quiet ride for a more comfortable driving experience.
- Top all-around performance on wet and dry roads.
- Excellent handling and a stable ride, especially at high speeds.
- Durable and long lasting design.
- Suitable for off-road usage.
- H, V, W rated construction.



Large shoulder blocks and center ribs provide responsiveness and high speed stability.



Widened tread design offers a larger ground contact area which effectively improves grip performance.



Tread design offers greater driving comfort and reduces noise emissions.

Four main grooves and small gradually winding lateral grooves reduce rolling resistance and effectively drain water for improved hydroplaning resistance.

The strong casing and special tread compound increases service life, driving comfort and excellent overall driving performance.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	UTQG
15	205/70R15	96H	STD	669	209	8.2	6.0	1565@44	440 A A
	225/70R15	100H	STD	697	228	8.2	6.5	1764@44	500 A B
	255/70R15	108T	-	739	260	9.0	7.5	2205@44	500 A B
16	235/60R16	100H	STD	688	240	8.2	7.0	1764@44	440 A A
	215/65R16	102H	XL	686	221	8.2	6.5	1874@50	440 A A
	215/70R16	100H	STD	708	221	9.0	6.5	1764@44	440 A A
	225/70R16	103T	-	722	228	9.0	6.5	1929@44	500 A B
	235/70R16	106H	STD	736	240	9.0	7.0	2094@44	440 A A
	245/70R16	111H	XL	750	248	9.0	7.0	2403@50	440 A A
	255/70R16	111T	-	764	260	9.0	7.5	2403@44	500 A B
	265/70R16	112H	STD	778	272	9.0	8.0	2469@44	440 A A
	275/70R16	114T	STD	792	279	9.0	8.0	2601@44	500 A B
17	265/75R16	116T	-	804	267	9.0	7.5	2756@44	500 A B
	235/55R17	103V	XL	690	245	8.2	7.5	1929@50	420 A A
	215/60R17	96H	STD	690	221	8.2	6.5	1565@44	440 A A
	225/60R17	99H	STD	702	228	8.2	6.5	1709@44	440 A A
	225/65R17	102H	STD	724	228	8.2	6.5	1874@44	440 A A
	235/65R17	108H	XL	738	240	9.0	7.0	2205@50	440 A A
	245/65R17	107T	-	750	248	9.0	7.0	2149@44	500 A B
	265/65R17	112T	STD	776	272	9.0	8.0	2469@44	500 A B
	275/65R17	115T	-	790	279	9.0	8.0	2679@44	500 A B
	245/70R17	110T	-	776	248	9.0	7.0	2337@44	500 A B
18	265/70R17	115T	-	804	272	9.0	8.0	2679@44	500 A B
	225/55R18	98V	STD	705	233	8.2	7.0	1653@44	420 A A
	235/55R18	100V	STD	715	245	8.2	7.5	1764@44	420 A A
	255/55R18	109V	XL	737	265	9.0	8.0	2271@50	420 A A
	235/60R18	103V	STD	739	240	8.2	7.0	1929@44	440 A A
	245/60R18	105H	STD	751	248	9.0	7.0	2039@44	500 A A
	265/60R18	110T	STD	775	272	9.0	8.0	2337@44	500 A B
	235/65R18	106T	-	763	240	9.0	7.0	2094@44	500 A B
	255/65R18	111T	STD	789	260	9.0	7.5	2403@44	500 A B
	265/65R18	114T	STD	801	272	9.0	8.0	2601@44	500 A B
	275/65R18	116T	-	815	279	9.0	8.0	2756@44	500 A B
19	255/70R18	113T	STD	815	260	9.0	7.5	2535@44	500 A B
	255/50R19	107V	XL	739	265	9.0	8.0	2149@50	420 A A
	245/50R20	102H	-	754	253	8.2	7.5	1874@44	500 A A
20	255/50R20	109W	XL	764	265	9.0	8.0	2271@50	420 A A



ALL-SEASON LIGHT TRUCK & SUV TIRE

TERRAMAX



PERFORMANCE RATINGS:



The **TERRAMAX H/T** is designed to let you challenge on-off road terrains with confidence. An all-season light truck tire designed with quiet on-road performance during city and highway use. Deep sizes provide excellent traction throughout the tire's life.

- Designed with the SUV in mind, the Terramax H/T balances off-road capabilities with characteristics of a comfortable highway tire.
- Specially formulated compound for improved wear resistance using the latest in environmentally friendly processes and materials.



► Pattern Design:

Improved water drainage for better all-terrain traction. The shoulder's optimized pitch design reduces noise emissions.



4-Channel zigzag grooves:

Maximize water drainage for improved handling and grip in all weather conditions. Zigzag pattern designed to minimize irregular wear.



Sipe Design:

Full depth sipes provide superior traction and handling in water and snow.

Outlined White Letter
LT225/75R16 LT215/85R16 LT235/85R16 * Black Sidewall

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi	UTQG	
15	215/75R15	100S	STD	703	216	9.0	6.0	1765@50	1610@50	500 A B	
	225/75R15	102S	STD	719	223	9.0	6.0	1875@50	1710@50	500 A B	
	235/75R15	105T	STD	733	235	9.0	6.5	1985@50	1820@50	500 A B	
	LT215/75R15	100/97R	6	699	223	11.5	6.0	1765@50	1610@50	-	
	LT225/75R15	102/99R	6	715	229	11.5	6.0	1875@50	1710@50	-	
	LT235/75R15	104/101R	6	729	239	11.5	6.5	1985@50	1820@50	-	
16	225/70R16	103T	STD	722	228	9.0	6.5	1929@44	-	500 A B	
	235/70R16	106T	STD	736	240	9.0	7.0	2094@44	-	500 A B	
	245/70R16	107T	STD	750	248	9.0	7.0	2149@44	-	500 A B	
	245/70R16	111S	XL	750	248	9.0	7.0	2403@50	-	500 A B	
	255/70R16	111T	STD	764	260	9.0	7.5	2403@44	-	500 A B	
	265/70R16	112T	STD	778	272	9.0	8.0	2469@44	-	500 A B	
	245/75R16	111T	STD	774	248	9.0	7.0	2403@44	-	500 A B	
	265/75R16	116T	STD	804	267	9.0	7.5	2756@44	-	500 A B	
	LT225/75R16 *	115/112R	10	744	223	11.3	6.0	2680@80	2470@80	-	
	LT245/75R16	120/116R	10	774	248	11.5	7.0	3042@80	2778@80	-	
17	LT265/75R16	123/120R	10	804	267	11.5	7.5	3415@80	3085@80	-	
	LT215/85R16 *	115/112R	10	772	216	11.3	6.0	2680@80	2470@80	-	
	LT235/85R16 *	120/116R	10	806	235	11.5	6.5	3042@80	2778@80	-	
	235/65R17	104T	STD	738	240	9.0	7.0	1985@44	-	500 A B	
	245/65R17	107T	STD	750	248	9.0	7.0	2150@44	-	500 A B	
	245/70R17	110T	STD	776	248	9.0	7.0	2335@44	-	500 A B	
	265/70R17	115T	STD	804	272	9.0	8.0	3195@44	-	500 A B	
	LT265/70R17	121/118R	10	804	272	11.5	8.0	3195@80	2910@80	-	
	15	31x10.50R15LT	109R	6	775	268	11.5	8.5	2270@50	-	-




TERRAMAX



The NEW Terramax A/T 3PMS is designed to deliver superior traction for SUVs, pickups and vans both off and on the road. The NEW Terramax A/T 3PMS provides the same exceptional handling, on-and-off-road stability and quiet, comfortable ride as the original Terramax A/T with the added bonus that it is winter tire tested and approved!

PERFORMANCE RATINGS:

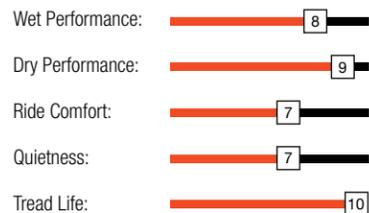

The **TERRAMAX A/T** is designed to deliver superior traction for SUVs, pickups and vans both off and on road. The A/T provides exceptional handling and on-and-off-road stability while maintaining a comfortable ride.

- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions.
- Solid center rib provides superior comfort and control.
- Extra deep tread sipes at varying angles improves comfort without sacrificing traction.



Large Serrated Block Design

The serrated block design provides excellent grip and traction performance.


Open Shoulder Design

Improved high speed stability and traction on dry and wet roads.



Tread Pattern: Effectively removes gravel and is capable of withstanding punctures from harsh pavements. Protects the tread from damage.

Staggered Tread Blocks Can effectively prevent uneven wear to improve off-road performance.

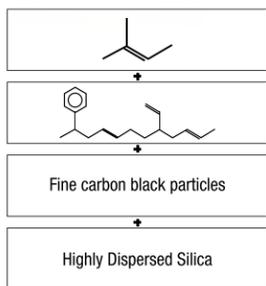

- High Strength
- Cut and Puncture Resistant
- High Wear Resistance
- Strong grip
- Great Hydroplaning Resistance
- Low Rolling Resistance
- Highly Elastic at Low Temperatures
- Excellent Winter Performance
- Exceptional Driving Safety
- Low Heat Buildup
- Long Tread Life



TERRAMAX A/T

Downard Claw-like Shoulder Design

Domineering style that effectively dissipates heat when driving long distances and at high speeds.

Sidewall Rim Protector

A shield design protects the alloy rims from collisions, impacts, and supports the sidewall.

Three-dimensional Peak Sidewall Design


Strengthens the sidewall to improve abrasion resistance.



Aggressive open shoulder tread design: efficiently expels snow, water, slush, and mud for optimum traction in all-terrain conditions.



Multi-directional sipe system: Extra deep tread sipes at varying angles improve comfort without sacrificing traction.



Solid center rib: Provides superior comfort and handling.



TERRAMAX A/T

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi	UTQG	
15	235/70R15	103S	-	711	240	10.5	7.0	1929@44	-	-	
	265/70R15	112S	-	753	272	10.5	8.0	2469@44	-	-	
	215/75R15	100S	STD	703	216	10.0	6.0	1764@44	-	500 A B	
	235/75R15	109S	XL	733	235	10.5	6.5	2271@50	-	500 A B	
	LT215/75R15	100/97R	6	703	216	12.5	6.0	1765@50	1610@50	-	
	LT235/75R15	104/101R	6	733	235	13.0	6.5	1985@50	1820@50	-	
	16	235/70R16	106S	STD	736	240	10.5	7.0	2094@44	-	500 A B
245/70R16		107S	-	750	248	10.5	7.0	2149@44	-	-	
265/70R16		112T	STD	778	272	10.5	8.0	2469@44	-	500 A B	
275/70R16		114S	STD	792	279	10.5	8.0	2601@44	-	500 A B	
245/75R16		111S	STD	774	248	10.5	7.0	2403@44	-	500 A B	
265/75R16		116S	STD	804	267	10.5	7.5	2756@44	-	500 A B	
LT245/70R16		113/110S	8	750	248	13.0	7.0	2535@65	2335@65	-	
LT225/75R16 *		115/112S	10	744	223	13.0	6.0	2680@80	2470@80	-	
LT245/75R16		120/116S	10	774	248	13.0	7.0	3042@80	2778@80	-	
LT265/75R16		123/120S	10	804	267	13.0	7.5	3415@80	3085@80	-	
LT285/75R16		126/123R	10	834	286	13.0	8.0	3750@80	3415@80	500 A B	
LT235/85R16 *		120/116R	10	806	235	13.0	6.5	3042@80	2778@80	-	
17		235/65R17	104S	STD	738	240	10.5	7.0	1984@44	-	500 A B
		245/65R17	107S	STD	750	248	10.5	7.0	2149@44	-	500 A B
		265/65R17	112S	STD	776	272	10.5	8.0	2469@44	-	500 A B
	275/65R17	115S	STD	790	279	10.5	8.0	2679@44	-	500 A B	
	245/70R17	110T	-	776	248	10.5	7.0	2337@44	-	500 A B	
	265/70R17	115S	STD	804	272	10.5	8.0	2679@44	-	500 A B	
	LT245/70R17	119/116S	10	776	248	13.0	7.0	3000@80	2755@80	-	
	LT265/70R17	121/118S	10	804	272	13.0	8.0	3195@80	2910@80	-	
	LT285/70R17	121/118R	10	834	286	13.0	8.0	3195@80	2910@80	500 A B	
	LT245/75R17	121/118S	10	800	248	13.0	7.0	3195@80	2910@80	-	
	LT235/80R17	120/117R	10	808	235	13.0	6.5	3085@80	2835@80	-	

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi	UTQG
18	265/65R18	114T	-	801	272	10.5	8.0	2601@44	-	500 A B
	275/65R18	116T	STD	815	279	10.5	8.0	2756@44	-	500 A B
	LT275/65R18	123/120R	10	815	279	13.0	8.0	3415@80	3085@80	-
	LT265/70R18	124/121R	10	829	272	13.0	8.0	3525@80	3195@80	-
	LT275/70R18	125/122R	10	843	279	13.0	8.0	3640@80	3305@80	-
	20	265/50R20	111T	XL	774	277	10.5	8.5	2403@50	-
275/55R20		117T	XL	810	284	10.5	8.5	2833@50	-	500 A B
275/60R20		115T	STD	838	279	13.0	8.0	2679@44	-	500 A B
LT305/55R20		121/118R	10	844	316	13.0	9.5	3195@80	2910@80	-
LT265/60R20		121/118R	10	826	272	13.0	8.0	3195@80	2910@80	-
LT275/60R20		123/120R	10	838	279	13.0	8.0	3415@80	3085@80	-
LT325/60R20		126/123R	10	898	331	13.0	9.5	3750@80	3415@80	-
LT275/65R20		126/123R	10	866	279	13.0	8.0	3750@80	3415@80	-
15	31x10.50R15LT	109S	6	775	268	13.0	8.5	2270@50	-	-

Outlined White Letter

LT225/75R16 LT235/85R16 LT265/70R18 275/55R20 275/60R20 LT275/65R20 * Black Sidewall




COMMERCIAL LIGHT TRUCK TIRE

COMMERCIO


VX1

PERFORMANCE RATINGS:

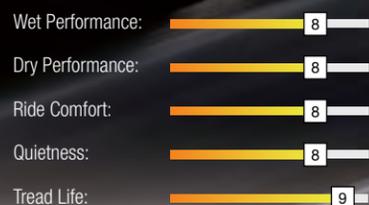

The **COMMERCIO VX1** is a light truck tire engineered for commercial delivery and demanding regional applications. Featuring an enhanced compound to resist tire damage, as well as a reinforced casing to improve load capacity. The Comercio VX1 delivers exceptional mileage and tread life.

New profile design with a significantly improved carrying capacity. Strengthened tread construction, abrasion resistance and puncture resistance. Special tread formula enhances traction and improves skid resistance.

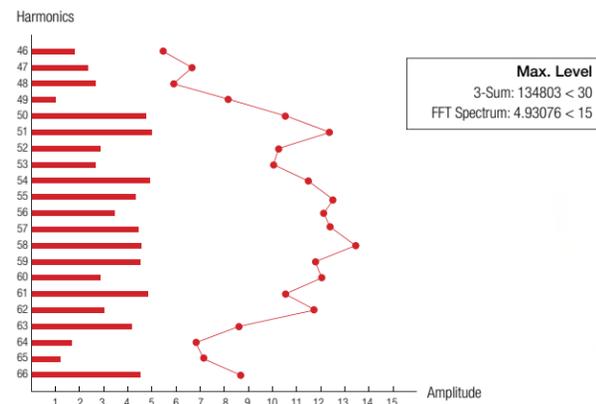

Variable Pitch Design
The tread is constructed with a variable pitch design which significantly reduces noise emissions for a more comfortable driving experience.



- 1** The new sipe design on the center blocks and shoulder improve handling and grip, dissipate heat, improve traction, and offer greater driving comfort.
- 2** Block groove angles help reduce noise emissions.



Main Groove Design
Three main grooves are designed to effectively drain water and offer greater high speed stability on wet and dry roads; improved traction and hydroplaning resistance.

Long Tread Life
The shoulder pattern design promotes uniform wear to offer greater mileage. Enhanced tread structure and tread formula improve wear and puncture resistance.




	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi
13	165R13C	94/93S	8	594	165	8.2	4.5	1477@65	1433@65
	175R13C	92/90S	6	610	177	8.2	5.0	1390@50	1325@50
14	175/65R14C	90/88T	6	584	177	8.5	6.0	1325@54	1235@54
	165/70R14C	89/87T	6	588	170	8.5	5.0	1280@54	1200@54
	205/75R14C	109/107R	8	664	203	9.0	5.5	2271@69	2149@69
15	205/65R15C	102/100T	6	647	209	9.5	6.0	1875@54	1765@54
	195/70R15C	104/102R	8	655	201	9.5	6.0	1985@65	1875@65
	205/70R15C	106/104R	8	669	209	9.5	6.0	2095@65	1985@65
	215/70R15C	109/107R	8	683	221	10.0	6.5	2270@65	2150@65
	225/70R15C	112/110R	8	697	228	10.0	6.5	2470@65	2335@65
	16	195/60R16C	99/97H	6	640	201	9.5	6.0	1710@54
	195/65R16C	104/102T	8	660	201	9.5	6.0	1985@69	1875@69
	205/65R16C	107/105T	8	672	209	9.5	6.0	2150@69	2040@69
	215/65R16C	109/107R	8	686	221	9.5	6.5	2270@69	2150@69
	225/65R16C	112/110R	8	698	228	10.0	6.5	2470@69	2335@69
	235/65R16C	115/113R	8	712	240	10.0	7.0	2680@69	2535@69
	195/75R16C	107/105Q	8	698	196	9.5	5.5	2150@69	2040@69
	205/75R16C	110/108R	8	714	203	9.5	5.5	2335@69	2205@69
	215/75R16C	113/111R	8	728	216	10.0	6.0	2535@69	2405@69



COMMERCIO VX+



PERFORMANCE RATINGS:

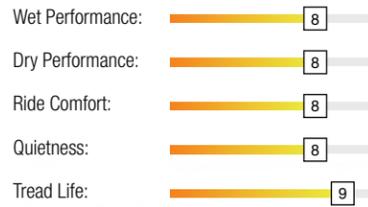

Sipe Design

The sipe design is optimized for wet weather driving. Improved handling and traction in wet weather conditions.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi
12	155R12C	88/86N	550	157	8.0	4.5	1235@65	1170@65
	155R12C	83/81P	553	157	8.0	4.5	1074@51	1019@51
	155R12C	88/86P	553	157	8.0	4.5	1235@65	1168@65
13	155R13C	85/83N	578	157	8.0	4.5	1135@50	1075@50
	155R13C	90/88N	578	157	8.0	4.5	1325@65	1235@65
	165R13C	91/89N	596	167	8.0	4.5	1355@54	1280@54
14	185R14C	102/100Q	650	188	9.0	5.5	1875@65	1765@65
	195R14C	106/104Q	666	198	9.0	5.5	2095@65	1985@65
	205R14C	109/107R	686	208	9.5	6.0	2270@65	2150@65
15	195R15C	106/104S	690	198	9.0	5.5	2095@65	1985@65
14	165/70R14C	89/87R	588	170	8.0	5.0	1280@54	1200@54
	195/70R15C	104/102R	655	201	9.0	6.0	1985@65	1875@65
	225/70R15C	112/110R	697	228	9.5	6.5	2470@65	2335@65
16	205/65R16C	107/105T	672	209	9.5	6.0	2150@69	2040@69
	195/75R16C	110/108Q	698	196	9.0	5.5	2335@76	2205@76
	215/75R16C	116/114R	728	216	9.5	6.0	2755@76	2600@76



SL12

The **SL12** is an all-season light truck tyre designed for delivery and demanding regional applications. Featuring a symmetrical pattern with extra wide grooves, the SL12 delivers excellent wet traction, and a quiet-comfortable ride, while the enhanced compound is engineered to deliver exceptional mileage.

PERFORMANCE RATINGS:

Wet Performance: 8

Dry Performance: 7

Ride Comfort: 8

Quietness: 9

Tread Life: 9



Full-depth microsipes
Improve heat dissipation
and traction.



Extra-wide zigzag grooves
deliver enhanced wet traction
and exceptional low speed
traction.

Wide shoulder reduces noise
emissions and improves stability.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	L.C.C. 1X lbs@psi	L.C.C. 2X lbs@psi
14	185R14C	102/100Q	8	650	188	9.0	5.5	1875@65	1765@65
	195R14C *	106/104Q	8	666	198	9.0	5.5	2095@65	1985@65
	205R14C	109/107R	8	686	208	9.5	6.0	2271@65	2150@65
	215R14C	112/110Q	8	700	218	9.5	6.0	2469@65	2337@65
15	195R15C	106/104S	8	690	198	9.0	5.5	2095@65	1985@65

Black Sidewall

185R14C 195R14C 205R14C 195R15C* Both Black Sidewall & White Ring are Available



LIGHT TRUCK TIRE


EXTMILE SL16

PERFORMANCE RATINGS:



SAILUN EXTMILE SERIES

New casing design improves tire strength to ensure greater load bearing capabilities. The new tread pattern design applies a more even grip for improved wear resistance and to promote even tread wear. Widened s-shaped grooves effectively drain water and reduce stone retention. New sidewall aesthetics added.

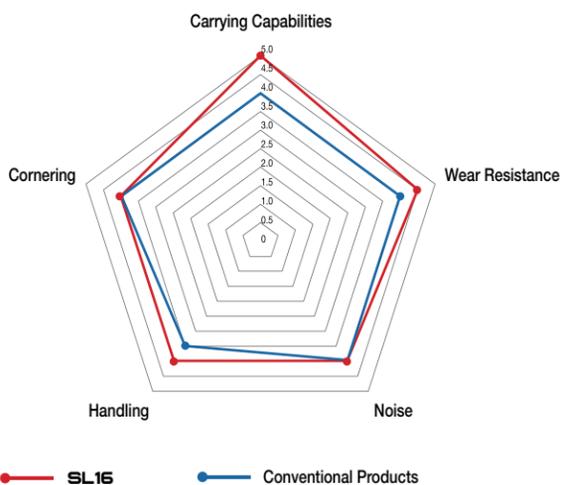

SL16 has noticeable improvements in wear resistance, load carrying capacity, and handling.

Strengthened Casing

New casing design improves strength for greater load bearing capabilities.

Optimized Tread Pattern Design

Even grip effectively improves wear resistance.



S-shaped Widened Grooves

Widened S-shaped Grooves
Effectively drains water and reduces stone retention.

Sidewall Design

Three-dimensional design just below the shoulder improves tire aesthetics.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
15	7.00R15 LT	110/105N	10	750	200	10.0	5.5
16	7.50R16 LT	122/118N	14	805	215	10.0	6.0



COMMERCIAL WINTER TIRE

ENDURE WSL1




ENDURE WSL1

Winter Snow Tire specifically designed for commercial light trucks. Specially designed formula used to conquer winter weather; provides optimal grip and stopping power on snow and ice.



Sidewall protection designed to resist against sidewall impacts and kerbing wear.

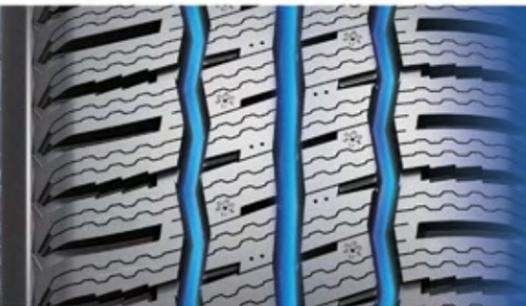

Main zigzag groove design and jagged shoulder grooves effectively drain water and snow for greater handling in wet and snowy weather conditions.



Staggered tread blocks improve handling safety while also providing greater traction.



Greater load bearing capability. Large block pattern improves load carrying capabilities and greater handling performance.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	185R14C	102/100R	8	650	188	9.6	5.0
	195R14C	106/104R	8	666	198	10.0	5.5
	175/65R14C	90/88T	8	584	177	9.6	5.0
15	205/65R15C	102/100R	8	647	209	10.0	6.0
	195/70R15C	104/102R	10	655	201	10.0	6.0
	205/70R15C	106/104R	8	669	209	10.0	6.0
	215/70R15C	109/107R	8	683	221	10.0	6.5
	225/70R15C	112/110R	8	697	228	10.0	6.5
16	195/60R16C	99/97T	6	640	201	10.0	6.0
	215/60R16C	103/101T	6	664	221	10.0	6.5
	195/65R16C	104/102R	10	660	201	10.0	6.0
	205/65R16C	107/105T	8	672	209	10.0	6.0
	215/65R16C	109/107T	8	686	221	10.0	6.5
	225/65R16C	112/110R	8	698	228	10.0	6.5
	235/65R16C	121/119R	8	712	240	10.0	7.0
	185/75R16C	104/102R	8	684	184	9.6	5.0
	195/75R16C	107/105R	8	698	196	10.0	5.5
	205/75R16C	113/111R	8	714	203	10.0	5.5
215/75R16C	116/114R	10	728	216	10.0	6.0	
	225/75R16C	121/120R	10	744	223	10.0	6.0




STUDLESS WINTER TIRE

ICE BLAZER WSL2



PERFORMANCE RATINGS:

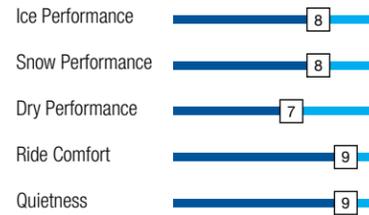

The **ICE BLAZER WSL2** is a studless winter tire, providing excellent slush, snow, and wet traction in cold climate conditions, while delivering a quiet and comfortable ride on dry roads.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Special tread formula compounds allows the rubber to maintain flexibility in extreme cold temperatures for maximum performance potential. This improves handling and overall safety for winter weather conditions.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	175/65R13	80T	558	177	8.7	5.0
	155/70R13	75T	548	157	8.0	4.5
	165/70R13	79T	562	170	8.0	5.0
	165/70R13	83T XL	562	170	8.0	5.0
	175/70R13	82T	576	177	8.7	5.0
	155/80R13	79T	578	157	8.0	4.5
14	185/60R14	82T	578	189	8.7	5.5
	155/65R14	75T	558	157	8.0	4.5
	175/65R14	82T	584	177	8.7	5.0
	185/65R14	86T	596	189	8.7	5.5
	165/70R14	81T	588	170	8.0	5.0
	175/70R14	84T	602	177	8.7	5.0
	185/70R14	88T	616	189	8.7	5.5
15	195/50R15	82H	577	201	8.7	6.0
	185/55R15	82H	585	194	8.7	6.0
	195/55R15	85H	595	201	8.7	6.0
	185/60R15	84T	603	189	8.7	5.5
	185/60R15	88T XL	603	189	8.7	5.5
	195/60R15	88H	615	201	8.7	6.0
	165/65R15	81T	595	170	8.0	5.0
	175/65R15	84T	609	177	8.7	5.0
	185/65R15	88T	621	189	8.7	5.5
	195/65R15	95T XL	635	201	8.7	6.0
	195/65R15	91T	635	201	8.7	6.0
	205/65R15	94H	647	209	9.1	6.0
	16	205/55R16	91T	632	214	9.1
205/55R16		91H	632	214	9.1	6.5
205/55R16		94H XL	632	214	9.1	6.5
215/55R16		93H	642	226	9.1	7.0
225/55R16		99H XL	654	233	9.1	7.0
205/60R16		92H	652	209	9.1	6.0
205/60R16		96H XL	652	209	9.1	6.0
215/60R16		95H	664	221	9.1	6.5
215/65R16		98H	686	221	9.1	6.5
17		225/45R17	94H XL	634	225	9.1
	205/50R17	93H XL	638	214	9.1	6.5
	225/50R17	98H XL	658	233	9.1	7.0
18	245/40R18	97V XL	653	248	9.1	8.5



Unique Groove Design:

The L-shaped grooves are specifically designed enhance grip on snow, slush, and water without compromising road noise.



Outer Tread Block Design:

Optimized to improve self-cleaning capabilities while also maximizing stability and overall grip in winter weather conditions. Minimized noise emissions.



Multi-directional high density siping:

Engineered to maximize directional grip on snow and ice while also minimizing road noise.






STUDDABLE WINTER TIRE

ICE BLAZER WST1



PERFORMANCE RATINGS:

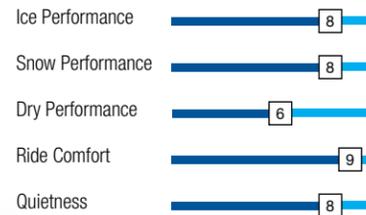

The **ICE BLAZER WST1** is a studdable winter tire designed for drivers that demand maximum traction in severe winter weather conditions, letting you outperform the elements to get more out of the winter season.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Specially formulated tread compound allows the tread rubber to maintain flexibility for exceptional performance in extreme cold temperatures. Improved safety and handling in winter weather conditions (indicated with the Severe Service Emblem).
- Specially blended tread rubber formula for excellent grip in low temperatures.



Special Buffer Layer

Special rubber buffer layer at the bottom of the stud absorbs the impact force of snow to prevent the fall in gout of studs.

ANTI-SKID PROPERTY



Innovative Square Design

Increases the ground contact area of the tire to effectively improve grip performance and increase skid resistance.



Cold-Resistant Tread Rubber

Tread formula compounds ensure the tire maintains elasticity and softness in extreme cold weather conditions. This improves grip on ice and snow, improves hydroplaning resistance, and lowers rolling resistance.



V-shaped Tread Design

Improved grip on ice and snow, skid resistance, and effectively reduces noise emissions.

Sipe Design

Optimized sipe design ensures greater grip on ice and snow.

Improved Studded Technology

12 rows of studs are designed to maximize grip and traction performance for safer driving in winter weather.

Sipe Design

Optimized depth and length of sipes maintain tread rigidity and greatly enhance grip and handling.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	Stud Size EN
13	155/70R13	75T	STD	548	157	10.0	4.5	9-11
	165/70R13	79T	STD	562	170	10.0	5.0	9-11
	175/70R13	82T	STD	576	177	10.0	5.0	9-11
	155/80R13	79T	STD	578	157	10.0	4.5	9-11
14	185R14C	102/100Q	8	650	188	10.0	5.5	9-11
	185/60R14	82T	STD	578	189	10.0	5.5	9-11
	155/65R14	75T	STD	558	157	10.0	4.5	9-11
	165/65R14	79T	STD	570	170	10.0	5.0	9-11
	175/65R14	82T	STD	584	177	10.0	5.0	9-11
	175/65R14C	90/88Q	6	584	177	10.0	5.0	9-11
	185/65R14	86T	STD	596	189	10.0	5.5	9-11
	175/70R14	84T	STD	602	177	10.0	5.0	9-11
	185/70R14	88T	STD	616	189	10.0	5.5	9-11



ICE BLAZER WST1

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	Stud Size EN
15	185/55R15	82T	STD	585	194	10.0	6.0	9-11
	185/60R15	84T	STD	603	189	10.0	5.5	9-11
	195/60R15	88T	STD	615	201	10.0	6.0	9-11
	175/65R15	84T	STD	609	177	10.0	5.0	9-11
	185/65R15	88T	STD	621	189	10.0	5.5	9-11
	195/65R15	91T	STD	635	201	10.0	6.0	9-11
	205/65R15	94T	STD	647	209	10.0	6.0	9-11
	215/65R15	96T	STD	661	221	10.0	6.5	9-11
	195/70R15C	104/102Q	8	655	201	10.5	6.0	9-11
	205/70R15	96T	STD	669	209	10.0	6.0	9-11
	205/70R15C	106/104R	8	669	209	10.5	6.0	9-11
	215/70R15	98T	STD	683	221	10.0	6.5	9-11
	215/70R15C	109/107R	8	683	221	10.5	6.5	9-11
	225/70R15C	112/110Q	8	697	228	10.5	6.5	9-11
	235/75R15	105S	STD	733	235	11.0	6.5	9-12
16	205/50R16	87T	--	612	214	10.0	6.5	9-11
	205/55R16	91T	STD	632	214	10.0	6.5	9-11
	215/55R16	97H	XL	642	226	10.0	7.0	9-11
	195/60R16C	99/97S	6	640	201	10.5	6.0	9-11
	205/60R16	92T	STD	652	209	10.0	6.0	9-11
	215/60R16	95T	STD	664	221	10.0	6.5	9-11
	225/60R16	98T	STD	676	228	10.0	6.5	9-11
	195/65R16C	104/102R	8	660	201	10.5	6.0	9-11
	205/65R16C	107/105Q	8	672	209	10.5	6.0	9-11
	205/65R16	95T	STD	672	209	10.0	6.0	9-11
	215/65R16	98T	STD	686	221	10.0	6.5	9-11
	215/65R16C	109/107R	8	686	221	10.5	6.5	9-11
	225/65R16	100T	STD	698	228	10.0	6.5	9-11
	225/65R16C	112/110R	8	698	228	10.5	6.5	9-11
	235/65R16C	115/113R	8	712	240	10.5	7.0	9-11
	235/65R16	103T	STD	712	240	10.0	7.0	9-11
	215/70R16	100S	STD	708	221	11.0	6.5	9-12
	215/70R16	100T	STD	708	221	11.0	6.5	9-12
	225/70R16	103S	STD	722	228	11.0	6.5	9-12
	225/70R16	103H	STD	722	228	11.0	6.5	9-12
	235/70R16	106S	STD	736	240	11.0	7.0	9-12
	235/70R16	106T	STD	736	240	11.0	7.0	9-12
	245/70R16	107S	STD	750	248	11.0	7.0	9-12
	245/70R16	107T	STD	750	248	11.0	7.0	9-12
	195/75R16C	107/105Q	8	698	196	10.5	5.5	9-11
	205/75R16C	110/108R	8	714	203	10.5	5.5	9-11
	215/75R16C	113/111R	8	728	216	10.5	6.0	9-11
	245/75R16	111S	STD	774	248	11.0	7.0	9-12

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	Stud Size EN
17	215/45R17	91T	--	626	213	10.0	7.0	9-11
	225/45R17	94H	XL	634	225	10.0	7.5	9-11
	235/45R17	97T	--	644	236	10.0	8.0	9-11
	215/50R17	95T	XL	648	226	10.0	7.0	9-11
	225/50R17	98H	XL	658	233	10.0	7.0	9-11
	215/55R17	94T	STD	668	226	11.0	7.0	9-12
	225/55R17	97T	STD	680	233	11.0	7.0	9-12
	235/55R17	99H	STD	690	245	10.0	7.5	9-11
	235/55R17	99V	STD	690	245	10.0	7.5	9-11
	215/60R17	96T	STD	690	221	10.0	6.5	9-11
	215/60R17	96H	STD	690	221	10.0	6.5	9-11
	225/60R17	99T	STD	702	228	10.0	6.5	9-11
	225/60R17	99H	STD	702	228	10.0	6.5	9-11
	235/60R17	102H	STD	714	240	10.0	7.0	9-11
	215/65R17	99T	STD	712	221	11.0	6.5	9-12
	225/65R17	102S	STD	724	228	11.0	6.5	9-12
	225/65R17	102T	STD	724	228	11.0	6.5	9-12
	235/65R17	104S	STD	738	240	11.0	7.0	9-12
	235/65R17	104T	STD	738	240	11.0	7.0	9-12
	245/65R17	107S	STD	750	248	11.0	7.0	9-12
	245/65R17	107T	STD	750	248	11.0	7.0	9-12
	265/65R17	112T	STD	776	272	11.0	8.0	9-12
	265/70R17	115S	STD	804	272	11.0	8.0	9-12
18	225/40R18	92H	XL	637	230	10.0	8.0	9-11
	225/45R18	95T	--	659	225	10.0	7.5	9-11
	245/45R18	100H	--	677	243	10.0	8.0	9-11
	235/50R18	101T	--	693	245	10.0	7.5	9-11
	215/55R18	95T	--	693	226	10.0	7.0	9-11
	225/55R18	98T	STD	705	233	10.0	7.0	9-11
	235/55R18	100T	STD	715	245	11.0	7.5	9-12
	235/55R18	100H	STD	715	245	11.0	7.5	9-12
	255/55R18	105H	STD	737	265	10.0	8.0	9-11
	255/55R18	105V	STD	737	265	10.0	8.0	9-11
	225/60R18	100T	STD	727	228	10.0	6.5	9-11
	235/60R18	103H	STD	739	240	10.0	7.0	9-11
19	255/50R19	107H	XL	739	265	10.0	8.0	9-11
	235/55R19	101H	STD	741	245	10.0	7.5	9-11
20	275/40R20	106H	XL	728	278	11.0	9.5	9-12




STUDDABLE WINTER TIRE

ICE BLAZER WST2 LT



PERFORMANCE RATINGS:

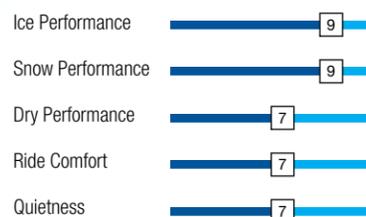

A studdable winter tire designed for light trucks, the **WST2 LT** maintains maximum traction while tackling the toughest on-off road conditions, whether it be snow, ice, or mud.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Specially formulated LT tread compound allows the rubber to maintain flexibility for excellent performance in extreme temperatures. Improves safety and handling in extreme weather conditions (designated with the Severe Service Emblem).
- Specially blended silica-reinforced formula gives the tire excellent grip performance in low temperatures.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	Stud Size EN
16	185/75R16C	104/102R	8	684	184	10.5	5.0	9-11
17	245/70R17	110S	STD	776	248	11.5	7.0	9-12
	265/70R17	115S	STD	804	272	11.5	8.0	9-12
18	235/60R18	107T	XL	739	240	11.5	7.0	9-12
	245/60R18	105T	STD	751	248	11.5	7.0	9-12
	265/60R18	110T	STD	775	272	11.5	8.0	9-12
	235/65R18	106T	STD	763	240	11.5	7.0	9-12
	265/65R18	114T	--	801	272	11.0	8.0	9-12
	275/65R18	116S	STD	815	279	11.5	8.0	9-12
	255/70R18	113S	--	815	260	11.0	7.5	9-12
20	245/50R20	102T	--	754	253	11.0	7.5	9-12
	275/55R20	117S	XL	810	284	11.5	8.5	9-12
	275/60R20	119S XL	XL	838	279	11.5	8.0	9-12



Angled groove design:
Efficiently drains slush and water to maximize grip and handling.

Variable pitch sequence:
Optimized to ensure a quiet and smooth ride.



16	LT225/75R16	115/112Q	10	744	223	13.5	6.0	9-13
	LT245/75R16	120/116Q	10	774	248	13.5	7.0	9-13
17	LT245/70R17	119/116Q	10	776	248	13.5	7.0	9-13
	LT265/70R17	121/118Q	10	804	272	13.5	8.0	9-13
18	LT245/75R17	121/118R	10	800	248	13.5	7.0	9-13
	LT275/65R18	123/120R	10	815	279	13.5	8.0	9-13
	LT265/70R18	124/121R	10	829	272	13.0	8.0	9-13
	LT275/70R18	125/122R	10	843	279	13.0	8.0	9-13



New Studdable Winter Tire

ICE BLAZER WST3

PERFORMANCE RATINGS:



Speical Tread Compound

The winter tread formula allows the tire to maintain elasticity to improve grip in extreme cold weather conditions.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	
13	155/70R13	75T	548	157	9.2	4.5	
	175/70R13	82T	576	177	9.2	5.0	
14	175/65R14	86TXL	584	177	9.2	5.0	
	185/65R14	90TXL	596	189	9.2	5.5	
	185/70R14	92TXL	616	189	9.2	5.5	
15	185/55R15	86TXL	585	194	9.2	6.0	
	185/60R15	88TXL	603	189	9.2	5.5	
	185/65R15	92TXL	621	189	9.2	5.5	
	195/65R15	95TXL	635	201	9.2	6.0	
	205/70R15	100TXL	669	209	9.2	6.0	
16	205/55R16	94TXL	632	214	9.2	6.5	
	205/60R16	96TXL	652	209	9.2	6.0	
	215/60R16	99TXL	664	221	9.2	6.5	
	215/65R16	102TXL	686	221	9.2	6.5	
	17	225/45R17	94TXL	634	225	9.2	7.5
		225/50R17	98TXL	658	233	9.2	7.0
215/55R17		98TXL	668	226	9.2	7.0	
225/55R17		101TXL	680	233	9.2	7.0	
235/55R17		103TXL	690	245	9.2	7.5	
18	215/60R17	100TXL	690	221	9.2	6.5	
	225/60R17	103TXL	702	228	9.2	6.5	
	225/40R18	92HXL	637	230	9.2	8.0	
	225/55R18	102TXL	705	233	9.2	7.0	
	225/60R18	104TXL	727	228	9.2	6.5	

Stud Design:

Variable stud arrangement and padded stud design ensure the studs don't move or come loose which ensures they improve grip on ice and snow.

Ice and Snow Handling:

New sipe pattern and saw-tooth block edges provide better handling and stability on snow and ice.



Traction:

The directional tread pattern and sipe design greatly improve snow, slush, and water drainage.





ULTRA HIGH PERFORMANCE TIRE


ATREZZO RUN-FLAT

PERFORMANCE RATINGS:




ATREZZO RUN-FLAT

Run-flat tires (RFT), also known as "self-supporting run-flat tires," are an important safety feature for any vehicle. A Run-flat tire is built with a thicker sidewall to help support the tire shape after losing air. This allows the tire to continue to run safely, but at a limited speed and mileage. When normal tires are punctured, they can instantly lead to a severe sidewall collapse; in the event of a collapse, the vehicle loses its only support which can cause the vehicle's center of gravity to change instantaneously. RFT helps to lessen the severity of a flat tire and allows you to get to the closest destination safely.

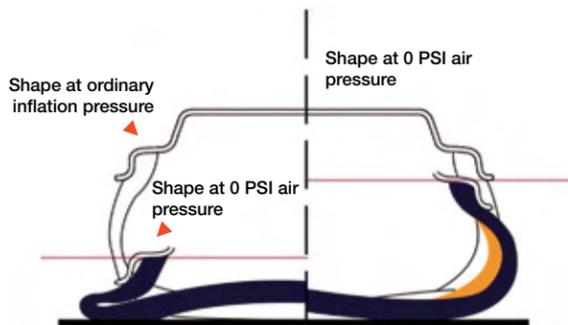

This is where run-flat tires come in; after the tire begins leaking air, the sidewall maintains its shape in order to continue to support the weight of the vehicle.

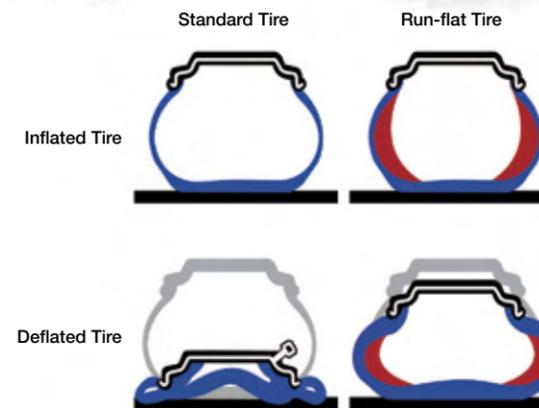

RFT Product Features:

1. Greater safety and the driver will not be delayed or stranded on remote highways because of a flat tire.
2. Avoid accidents caused by the loss of control from punctures or air leaks: When the tire is flat, even if all the air pressure has leaked from the tire, the vehicle will continue to drive at normal speeds without having to be replaced immediately.
3. Even when your tire begins leaking air you can drive to your local tire dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	SLR
16	195/55RF16	87V	620	201	8.2	6.0	11.3
	205/55ZRF16	91W	632	214	8.3	6.5	11.5
17	205/45ZRF17	84V	616	206	8.2	7.0	11.3
	205/45ZRF17	88WXL	616	206	8.2	8.0	11.3
	225/45ZRF17	91W	634	225	8.2	7.5	11.6
	225/45ZRF17	91Y	634	225	8.2	7.5	11.6
	205/50ZRF17	89W	638	214	8.2	6.5	11.7
	225/50ZRF17	94W	658	233	8.2	7.0	12.0
18	225/55ZRF17	97Y	680	233	8.2	7.0	12.3
	255/35ZRF18	90Y	635	260	8.2	9.0	11.7
	225/40ZRF18	92Y	637	230	8.2	8.0	11.8
	245/40ZRF18	97Y	653	248	8.2	8.5	12.0
19	275/35ZRF19	96Y	675	278	8.2	9.5	12.5
	275/35ZRF19	100YXL	675	278	8.2	9.5	12.5
	245/40ZRF19	94Y	679	248	8.2	8.5	12.5
	245/40ZRF19	98YXL	679	248	8.2	8.5	12.5



SAILUN

9840 SW 77TH AVE.
PH #301
MIAMI, FL 33156
UNITED STATES

TEL: (+1) 786-573-0757

INFO@GRUPOSAILUN.COM

REV 1.17